

Technical Data Sheet Reverse Package Chip LED

23-21/R6C-AM1N2VY/2A

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

Descriptions

- The 23-21 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.
- Indoor signboard use.

Device Selection Guide

D. AN	Chip	E LC.L.	Resin Color	
Part No.	Material	Emitted Color		
23-21/R6C-AM1N2VY/2A	AlGaInP	Brilliant Red	Water Clear	


Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 1 of 10







23-21/R6C-AM1N2VY/2A


Package Outline Dimensions














Note: The tolerances unless mentioned is ± 0.1 mm,Unit = mm

Everlight Electronics Co., Ltd.

Device No: DSE-0003998

http://www.everlight.com

Prepared date: 23-Jul-2010

Rev.1 Page: 2 of 10

Prepared by: Huangyongxin



23-21/R6C-AM1N2VY/2A

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V_R	5	V	
Forward Current	IF	25	mA	
Operating Temperature	IFP	60	mA	
Storage Temperature	Pd	60	mW	
Electrostatic Discharge (HBM)	ESD	2000	V	
Power Dissipation	Topr	-40 ~ +85	${\mathbb C}$	
Peak Forward Current (Duty 1/10 @1KHz)	Tstg	-40 ~ +90	$^{\circ}$ C	
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec. Hand Soldering: 350 °C for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	18.0		45.0	mcd	
Viewing Angle	2 \theta 1/2		130		deg	
Peak Wavelength	λp		632		nm	
Dominant Wavelength	λd	617.5		633.5	nm	IF=20mA
Spectrum Radiation Bandwidth	Δλ		20		nm	
Forward Voltage	VF	1.70		2.20	V	
Reverse Current	Ir			10	μΑ	V _R =5V

Notes:

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 3 of 10



23-21/R6C-AM1N2VY/2A

Bin Range Of Dom. Wavelength

Group	Bin	Min	Max	Unit	Condition	
A	E4	617.5	621.5			
	E5	621.5	625.5		I _F =20mA	
	E6	625.5	629.5	nm		
	E7	629.5	633.5			

Bin Range Of Luminous Intensity

	·				
Bin	Min	Max	Unit	Condition	
M1	18.0	22.5	mcd		
M2	22.5	28.5		IF=20mA	
N1	28.5	36.0			
N2	36.0	45.0			

Bin Range Of Forward Voltage

		0			
Group	Bin	Min	Max	Unit	Condition
	19	1.70	1.80		
	20	1.80	1.90		
V	21	1.90	2.00	V	IF=20mA
	22	2.00	2.10		
	23	2.10	2.20		

Notes:

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Dominant Wavelength ±1nm


3.Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 4 of 10



23-21/R6C-AM1N2VY/2A

Typical Electro-Optical Characteristics Curves

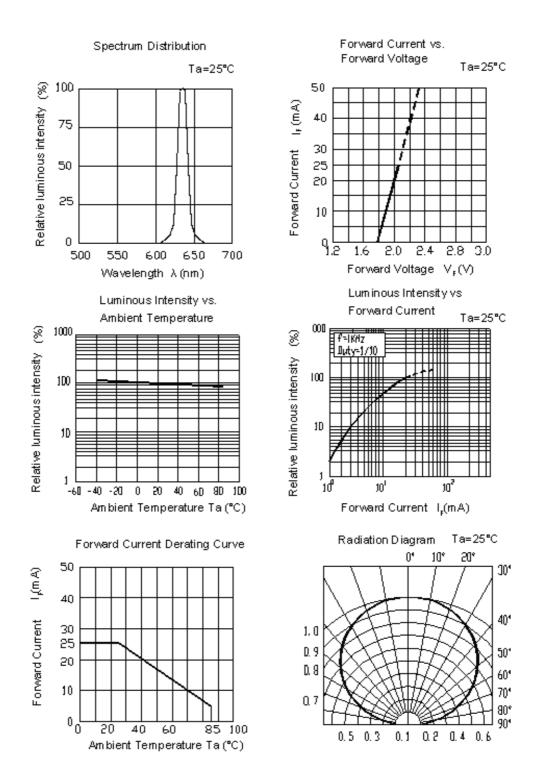

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 5 of 10




23-21/R6C-AM1N2VY/2A

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

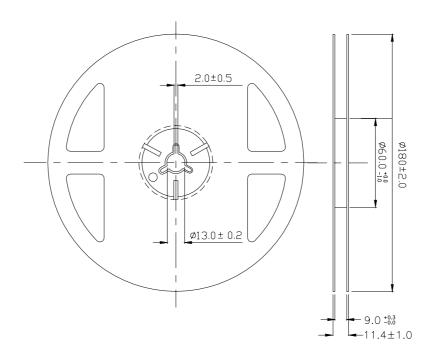


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 6 of 10




23-21/R6C-AM1N2VY/2A

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

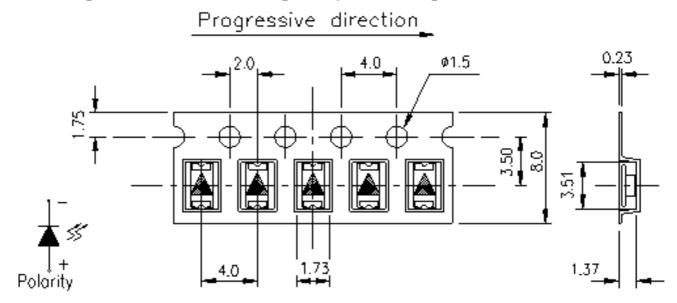

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

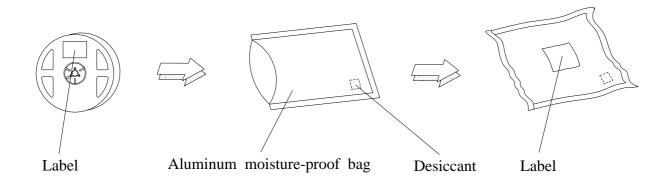

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 7 of 10



23-21/R6C-AM1N2VY/2A

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 8 of 10



23-21/R6C-AM1N2VY/2A

Precautions For Use

1. Over-current-proof


Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

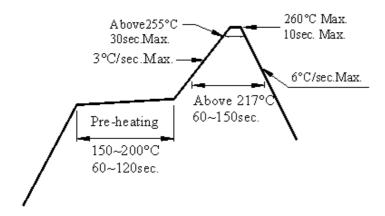

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 9 of 10




23-21/R6C-AM1N2VY/2A

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

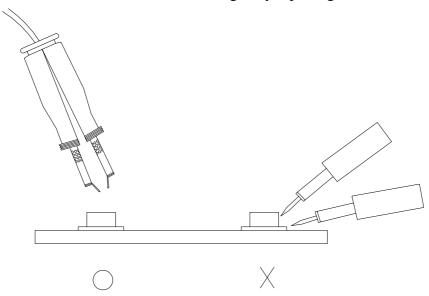

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 10 of 10