# EVERLIGHT ELECTRONICS CO.,LTD.

## **Technical Data Sheet**

# **Chip LED with Right Angle Lens**

# 27-21/Y2C-CPQB/3C

#### **Features**

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.

### **Descriptions**

- The 27-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

### **Applications**

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

#### **Device Selection Guide**

Part No.		T C.1	
	Material	<b>Emitted Color</b>	Lens Color
27-21/Y2C-CPQB/3C	AlGaInP	Brilliant Yellow	Water Clear



Everlight Electronics Co., Ltd.

Device No:DSE-271-Y02


Prepared date: 26-Apr-2005

http://www.everlight.com


Rev 1 Page: 1 of 10


Prepared by: Jessica Chang


## **Package Outline Dimensions**











**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm



# **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}$
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$
Power Dissipation	Pd	60	mW
Peak Forward Current (Duty 1/10 @1KHz)	IFP	60	mA
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec.  Hand Soldering: 350 °C for 3 sec.	

## **Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	45.0		112.0	mcd	
Peak Wavelength	λр		591		nm	
Dominant Wavelength	λd	585.5		591.5	nm	
Spectrum Radiation Bandwidth	Δλ		15		nm	IF=20mA
Viewing Angle	2 0 1/2		130		deg	
Forward Voltage	VF	1.75		2.35	V	
Reverse Current	IR			10	$\mu$ A	V <sub>R</sub> =5V

#### **Notes:**

- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3. Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 3 of 10

Device No:DSE-271-Y02 Prepared date: 26-Apr-2005 Prepared by: Jessica Chang

### Bin Range Of Dom. Wavelength

Groups	Bin	Min	Max	Unit	Condition
C	D3	585.5	588.5		I- 20 A
	D4	588.5	591.5	nm	IF=20mA

## **Bin Range Of Luminous Intensity**

Bin	Min	Max	Unit	Condition	
P	45.0	72.0	1	I 20 A	
Q	72.0	112.0	mcd	IF=20mA	

### **Bin Range Of Forward Voltage**

	1		I		
Groups	Bin	Min	Max	Unit	Condition
	0	1.75	1.95		
В	1	1.95	2.15	V	IF=20mA
	2	2.15	2.35		

#### **Notes:**

- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. Device No:DSE-271-Y02


http://www.everlight.com Prepared date: 26-Apr-2005

Prepared by: Jessica Chang

Page: 4 of 10

Rev 1

### **Typical Electro-Optical Characteristics Curves**

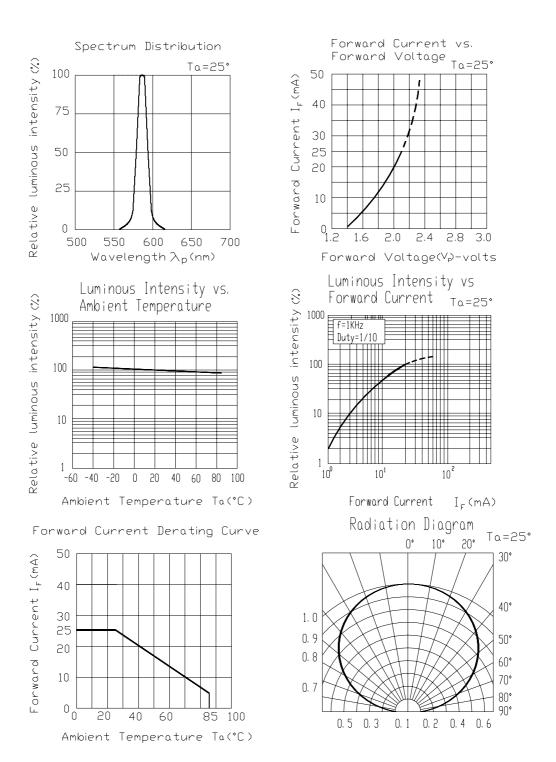

http://www.everlight.com

Prepared date: 26-Apr-2005

Rev 1

Prepared by: Jessica Chang

Page: 5 of 10

# Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 




#### **Reel Dimensions**

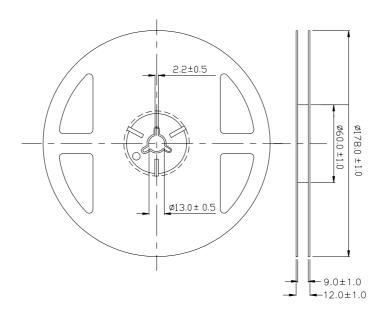


**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

# Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

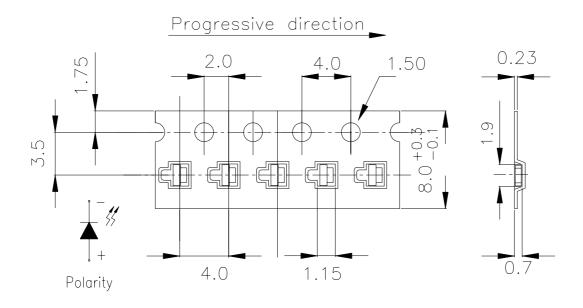

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

### **Moisture Resistant Packaging**

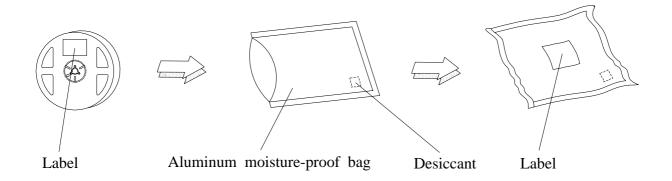

Everlight Electronics Co., Ltd. Device No:DSE-271-Y02

http://www.everlight.com

Prepared date: 26-Apr-2005

Rev 1

Page: 7 of 10

Prepared by: Jessica Chang



## **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°ℂ	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. Device No:DSE-271-Y02

http://www.everlight.com Prepared date: 26-Apr-2005 Rev 1 Prepared by: Jessica Chang

Page: 8 of 10


#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

#### 2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
  Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

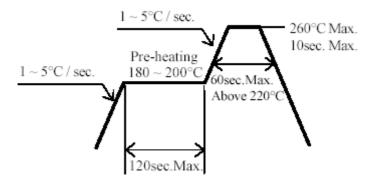

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 9 of 10

Device No:DSE-271-Y02 Prepared date: 26-Apr-2005 Prepared by: Jessica Chang




#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

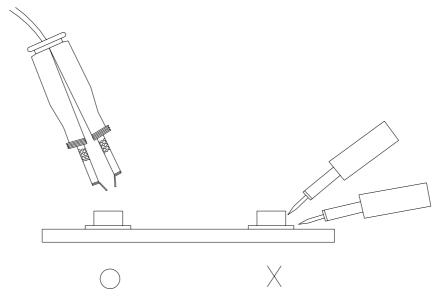

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 10 of 10 Device No:DSE-271-Y02 Prepared date: 26-Apr-2005 Prepared by: Jessica Chang