# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

# **Technical Data Sheet**

# **Chip LED with Right Angle Lens**

### Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

### Descriptions

- The 12-21C SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

### Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.
- Indoor signboard use.


### **Device Selection Guide**

De 14 Ma	C	Larra Galar	
Part No.	Material	<b>Emitted Color</b>	Lens Color
12-21C/R6C-AS1T1B/2C	AlGaInP	Brilliant Red	Water Clear






### **Package Outline Dimensions**

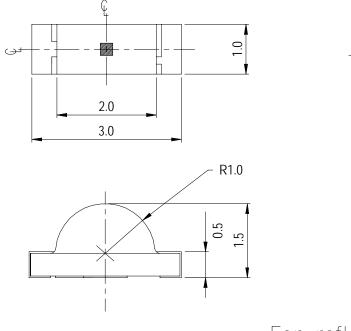



For reflow soldering (propose)

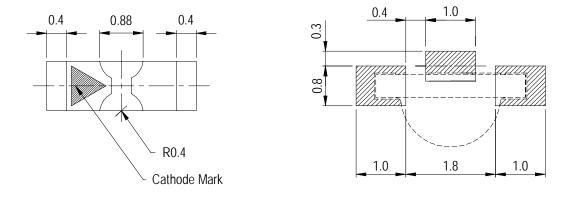

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm,Unit = mm

Everlight Electronics Co., Ltd. Device No. : DSE-12C-R03 http://www.everlight.com Prepared date: 12-Spe-2005 EVERLIGHT ELECTRONICS CO.,LTD.

### 12-21C/R6C-AS1T1B/2C

### Absolute Maximum Ratings (Ta=25°C)

**EVERLIGHT** 

Parameter		Symbol		Rating		Unit	
Reverse Voltage		VR		5		V	
Forward Current		IF		25		mA	
Operating Tempe	rature	Topr		-40 ~ +85		°C	
Storage Tempera	ature	Tstg		-40 ~ +90		°C	
Soldering Temper	rature	Tsol		260 (for 5 seconds)		°C	
Electrostatic Discharge(HB)		ESD		2000		V	
Power Dissipat	ion	Pd		60		mW	
Peak Forward Current (Duty 1/10 @1KHz)		IFP		60		mA	
Soldering Temperature		Tsol	Ha	Reflow Soldering : $260 \degree$ Cfor 10 secHand Soldering : $350 \degree$ Cfor 3 sec.			
Electro-Optical C	haracteri	stics (Ta	=25℃)	1			
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	Iv	225.0		565.0	mcd		
Peak Wavelength	λp		632.0		nm		
Dominant Wavelength	λd	617.5		633.5	nm	In 20m A	
Spectrum Radiation Bandwidth	$ riangle \lambda$		20		nm	IF=20mA	
Viewing Angle	$2 \theta 1/2$		100		deg		
Forward Voltage	$\mathbf{V}_{\mathrm{F}}$	1.75		2.35	V		
Reverse Current	Ir			10	$\mu A$	V <sub>R</sub> =5V	

#### Notes:

# 1.Tolerance of Luminous Intensity ±10% 2.Tolerance of Dominant Wavelength ±1nm 3.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd.

EVERLIGHT ELECTRONICS CO.,LTD.

# 12-21C/R6C-AS1T1B/2C

### **Bin Range Of Dom. Wavelength**

ÆRLIGHT

Group	Bin	Min	Max	Unit	Condition	
Α	E4	617.5	621.5			
	E5	621.5	625.5		IF=20mA	
	E6	625.5	629.5	nm		
	E7	629.5	633.5			

### **Bin Range Of Luminous Intensity**

Bin	Min	Max	Unit	Condition
S1	180	225		
S2	225	285	mcd	IF=20mA
T1	285	360		

### **Bin Range Of Forward Voltage**

Group	Bin	Min	Max	Unit	Condition	
В	0	1.75	1.95			
	1	1.95	2.15	V	IF=20mA	
	2	2.15	2.35			


### Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.1V

### **Typical Electro-Optical Characteristics Curves**

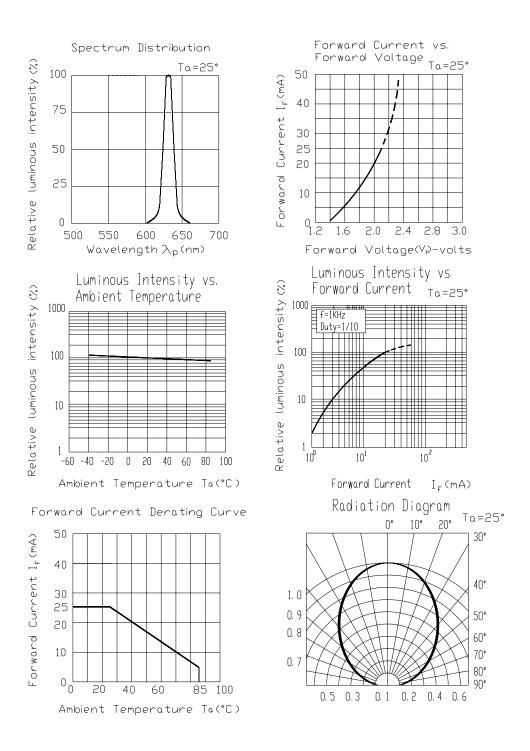

http://www.everlight.com Prepared date: 12-Spe-2005

# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.


# 12-21C/R6C-AS1T1B/2C

### Label explanation

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**



### **Reel Dimensions**

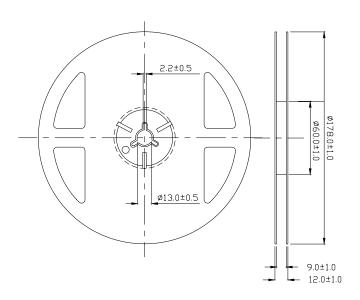


### **Note:** The tolerances unless mentioned is $\pm 0.1$ mm ,Unit = mm

http://www.everlight.com Prepared date: 12-Spe-2005

# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.


## 12-21C/R6C-AS1T1B/2C

### **Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel**

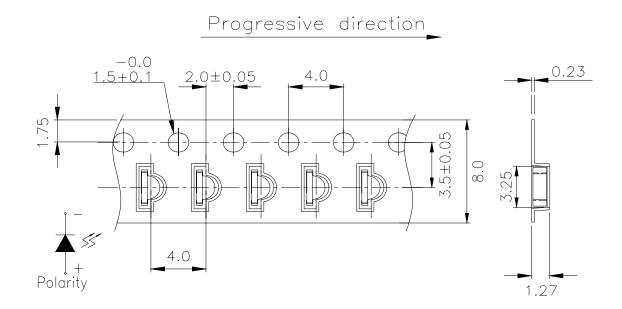

**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm ,Unit = mm

### **Moisture Resistant Packaging**

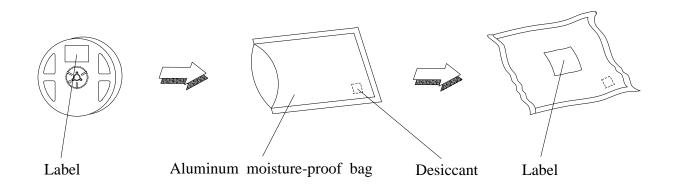

### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min $\int 10 \sec$ L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100℃	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	<b>Temp.</b> : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1


### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big

current change ( Burn out will happen ).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
  Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

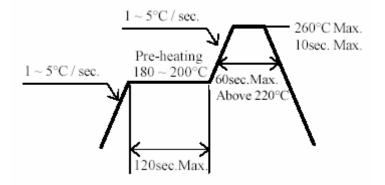


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

#### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

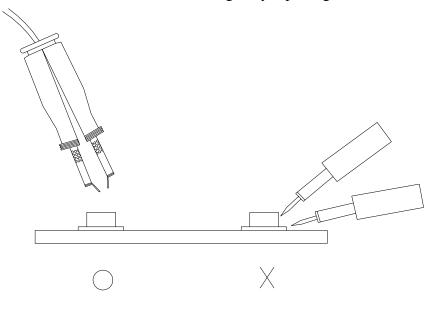

#### EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

*Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com* 

Everlight Electronics Co., Ltd. Device No. : DSE-12C-R03 http://www.everlight.com Prepared date: 12-Spe-2005 Rev.1 Page: 10 of 10 Prepared by: Kenny Wang