EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet

Chip LED with Right Angle Lens

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow

solder process.

- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS complaint version

Descriptions

- The 12-21 SMD taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications etc.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: Indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.
- Indoor signboard use.

Device Selection Guide

Part No.	Material	Emitted Color	Lens Color
12-21/G6C-BN2P2B/2C	AlGaInP	Brilliant Yellow Green	Water Clear





12-21/G6C-BN2P2B/2C

Everlight Electronics Co., Ltd. Device No. : SZDSE-121-G08





Package Outline Dimensions

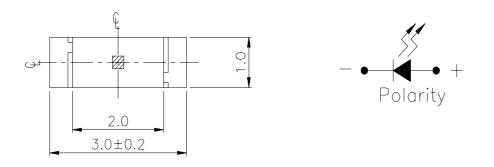









Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Everlight Electronics Co., Ltd. Device No. : SZDSE-121-G08 http://www.everlight.com Prepared date: 29-July-2005 Rev.1 Page: 2 of10 Prepared by: Wu xiaowei EVERLIGHT ELECTRONICS CO., LTD.

<u>12-21/G6C-BN2P2B/2C</u>

Absolute Maximum Ratings (Ta=25°C)

EVERLIGHT

Thosofute maximum Ratings (11–25 C)					
Parameter	Symbol	Rating	Unit		
Reverse Voltage	V _R	5	V		
Forward Current	I _F	25	mA		
Operating Temperature	Topr	-40 ~ +85	°C		
Storage Temperature	Tstg	-40 ~ +90	°C		
Electrostatic Discharge (HBM)	ESD	2000	V		
Power Dissipation	P _d	60	mW		
Peak Forward Current (Duty 1/10 @1KHz)	I _{FP}	60	mA		
Soldering Temperature	Tsol	Reflow Soldering : 260 $^{\circ}$ C for 10 sec. Hand Soldering : 350 $^{\circ}$ C for 3 sec.			

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	I_V	36.0		72.0	mcd	
Peak Wavelength	λp		575		nm	
Dominant Wavelength	λd	567.5		575.5	nm	
Spectrum Radiation Bandwidth	$ riangle \lambda$		20		nm	I _F =20mA
Viewing Angle	2 0 1/2		120		deg	
Forward Voltage	V_{F}	1.75		2.35	V	
Reverse Current	I _R			10	$\mu \mathbf{A}$	V _R =5V

Notes:

- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. Device No. : SZDSE-121-G08 http://www.everlight.com Prepared date: 29-July-2005 EVERLIGHT ELECTRONICS CO., LTD.

<u>12-21/G6C-BN2P2B/2C</u>

Bin Range Of Dom. Wavelength

ÆRLIGHT

Group	Bin	Min	Max	Unit	Condition	
В	C15	567.5	569.5			
	C16	569.5	571.5		I _F =20mA	
	C17	571.5	573.5	nm		
	C18	573.5	575.5			

Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition
N2	36.0	45.0		
P1	45.0	57.0	mcd	I _F =20mA
P2	57.0	72.0		

Bin Range Of Forward Voltage

Group	Bin	Min	Max	Unit	Condition	
В	0	1.75	1.95			
	1	1.95	2.15	V	I _F =20mA	
	2	2.15	2.35			

Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm


3.Tolerance of Forward Voltage ±0.1V

EVERLIGHT ELECTRONICS CO., LTD.

<u>12-21/G6C-BN2P2B/2C</u>

Typical Electro-Optical Characteristics Curves

ÆRLIGHT

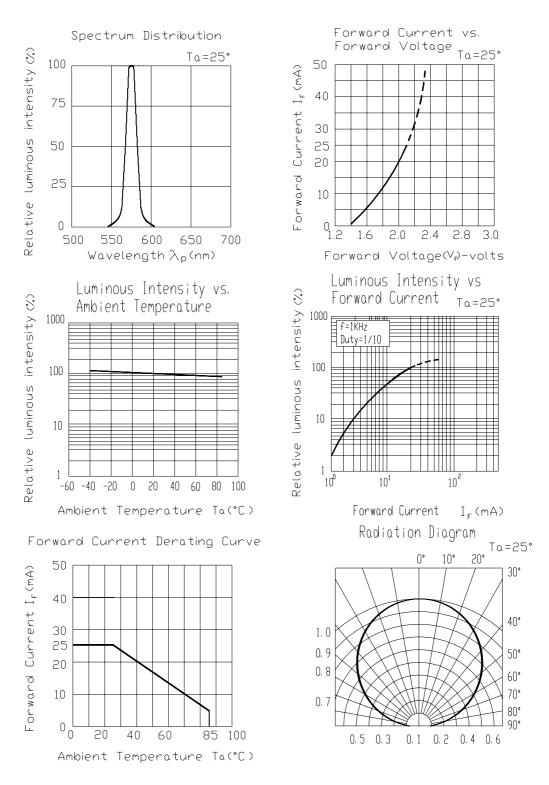

Everlight Electronics Co., Ltd. Device No. : SZDSE-121-G08 http://www.everlight.com Prepared date: 29-July-2005 Rev.1 Page: 5 of10 Prepared by: Wu xiaowei

VERLIGHT EVERLIGHT ELECTRONICS CO.,LTD.

<u>12-21/G6C-BN2P2B/2C</u>

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank




Reel Dimensions

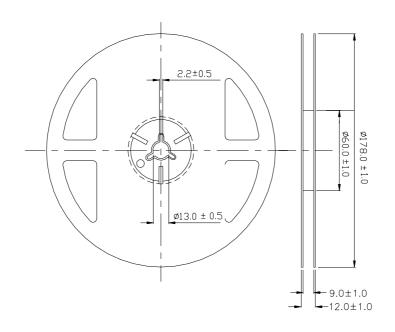

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm


Everlight Electronics Co., Ltd. Device No. : SZDSE-121-G08 http://www.everlight.com Prepared date: 29-July-2005 Rev.1 Page: 6 of10 Prepared by: Wu xiaowei

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

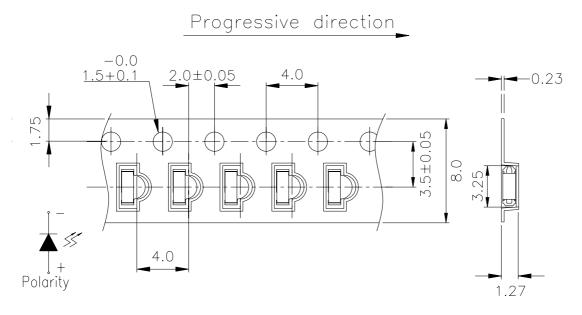

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Moisture Resistant Packaging

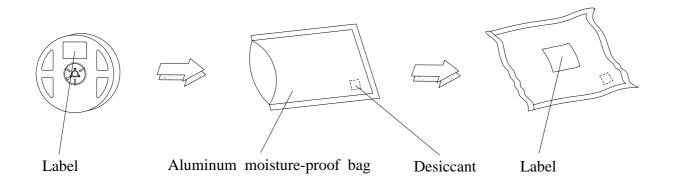

Everlight Electronics Co., Ltd. Device No. : SZDSE-121-G08 http://www.everlight.com Prepared date: 29-July-2005 Rev.1 Page: 7 of10 Prepared by: Wu xiaowei

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min \int 10 sec L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1


12-21/G6C-BN2P2B/2C

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30° C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30° C or less and 60%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
 Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

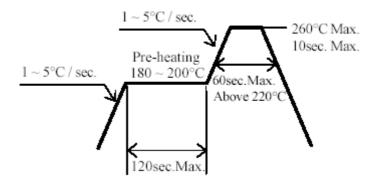

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.


4.Soldering Iron

Everlight Electronics Co., Ltd. Device No. : SZDSE-121-G08 http://www.everlight.com Prepared date: 29-July-2005

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

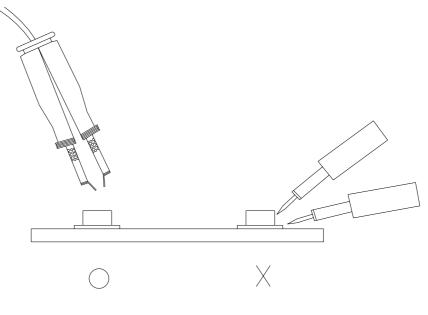

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

Everlight Electronics Co., Ltd. Device No. : SZDSE-121-G08 http://www.everlight.com Prepared date: 29-July-2005 Rev.1 Page: 10 of 10 Prepared by: Wu xiaowei