

**LED ASSEMBLY****5mm Circuit Board Indicator,T-1 3/4****A2703B/G****Features**

- Low power consumption
- High efficiency and low cost
- Good control and free combinations on the colors of LED lamps
- Stackable and easy to assembly
- Stackable vertically and easy to assembly
- Versatile mounting on PCB or panel
- Stackable horizontally and easy to assembly

**Descriptions**

- Used as indicators of indicating the degrees, functions, positions etc, in electronic instruments.


**Applications**

- ARRAY=Plastic Holder Combination of Lamps
- The array will easily mount the applicable lamps on any panel

**Device Selection Guide**

LED PART NO.	Chip		Lens Color
	Material	Emitted Color	
7363GD	GaP	Green	Green Diffused

**Package Dimensions**

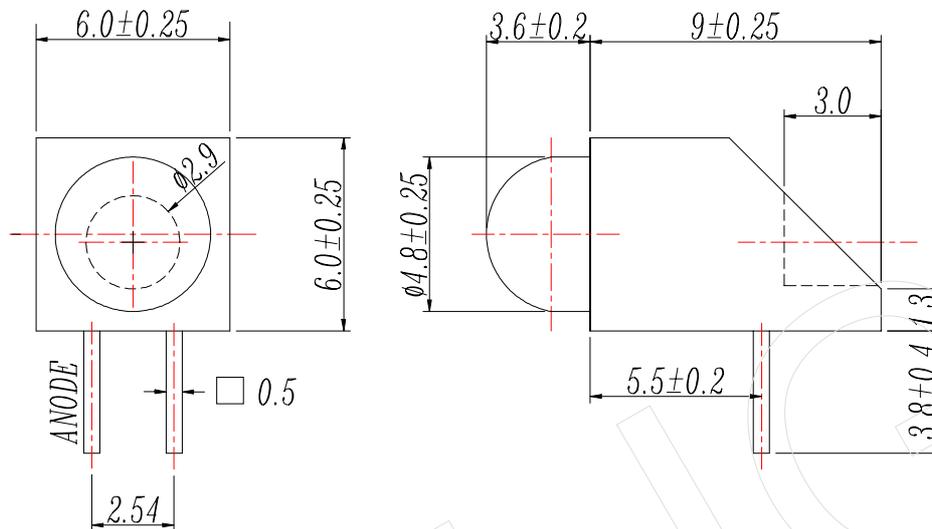

**Notes:**

- All dimensions are in millimeters, tolerance is 0.25mm except being specified.
- Lead spacing is measured where the lead emerges from the package.

**Absolute Maximum Ratings (Ta=5°C)**

Parameter	Symbol	Rating	Units
Forward Current	$I_F$	30	mA
Pulse Forward Current <sup>*1</sup>	$I_{FP}$	160	mA
Operating Temperature	$T_{opr}$	-40 ~ +85	°C
Storage Temperature	$T_{stg}$	-40 ~ +100	°C
Soldering Temperature <sup>*2</sup>	$T_{sol}$	$260 \pm 5$	°C
Power Dissipation	$P_d$	100	mW
Reverse Voltage	$V_R$	5	V

**Notes:** \*1: $I_{FP}$  Conditions--Pulse Width  $\leq 10$ msec and Duty  $\leq 1/10$ .

\*2:Soldering time  $\leq 5$  seconds.

**Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Forward Voltage	$V_F$	$I_F=20mA$	1.7	2.1	2.4	V
Reverse Current	$I_R$	$V_R=5V$	--	--	10	$\mu A$
Luminous Intensity	$I_V$	$I_F=10mA$	2.5	5.0	--	mcd
Viewing Angle	$2\theta_{1/2}$	$I_F=20mA$	--	60	--	deg
Peak Wavelength	$\lambda_p$	$I_F=20mA$	--	565	--	nm
Dominant Wavelength	$\lambda_d$	$I_F=20mA$	--	570	--	nm
Spectrum Radiation Bandwidth	$\Delta\lambda$	$I_F=20mA$	--	20	--	nm

**Typical Electro-Optical Characteristics Curves**

