

Technical Data Sheet -Preliminary

Top View LEDs

45-21S/KK2C-B5063L1L4B12Z3/2T

Features

- P-LCC-3 package.
- High flux output.
- High current capability.
- White package.
- Optical indicator.
- Colorless clear window.
- Ideal for backlight and light pipe application.
- Inter reflector.
- Wide viewing angle.
- Suitable for automatic placement equipment.
- Suitable for vapor-phase reflow.
- Available on tape and reel (8mm Tape).
- Pb-free.
- The product itself will remain within RoHS compliant version.



Descriptions

- The 45-21S series is available in soft orange, red and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector.
- This feature makes the ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- Indicator and backlight for audio and video equipment.
- Indicator and backlight in office and family equipment.
- Flat backlight for LCD's, switches and symbols.
- Light pipe application.
- General use.

Device Selection Guide


Chip	Emitted Color	Resin Color
Material		
InGaN	Pure White	Water Clear

Technical Data Sheet -Preliminary

Top View LEDs

45-21S/KK2C-B5063L1L4B12Z3/2T

Package Dimensions

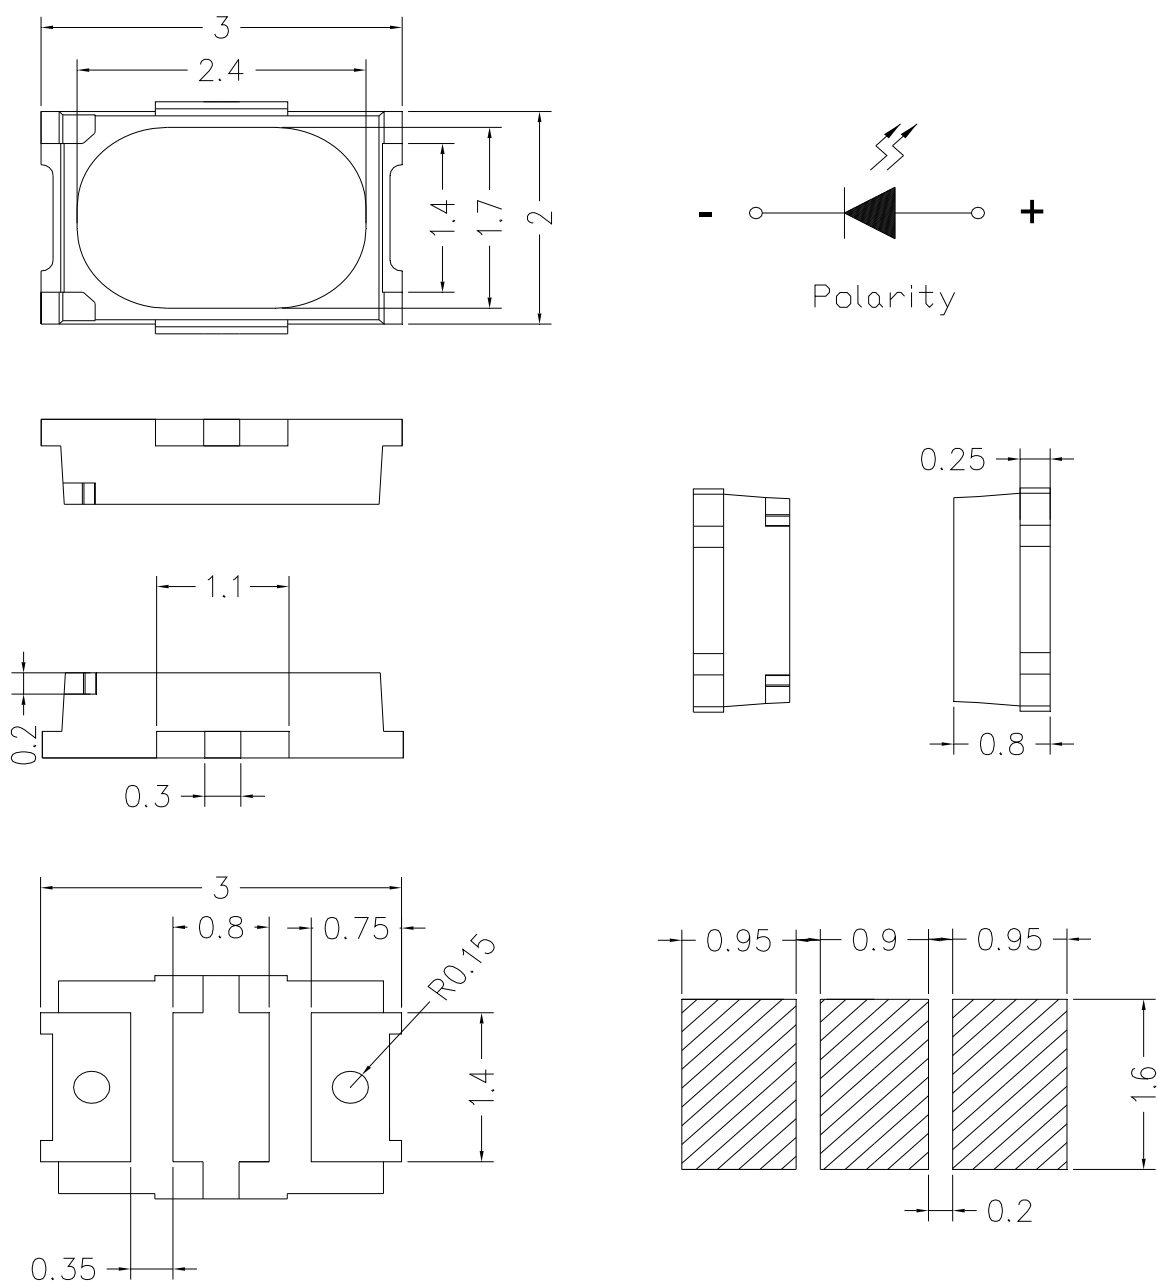

Note: The tolerances unless mentioned is $\pm 0.1\text{mm}$;Unit = mm

Technical Data Sheet -Preliminary

Top View LEDs

45-21S/KK2C-B5063L1L4B12Z3/2T

Absolute Maximum Ratings (T_A=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V _R	5	V
Forward Current	I _F	30	mA
Peak Forward Current (Duty 1/10 @1KHz)	I _{FP}	100	mA
Power Dissipation	P _d	110	mW
Electrostatic Discharge(HBM)	ESD	1000	V
Operating Temperature	T _{opr}	-40 ~ +85	°C
Storage Temperature	T _{stg}	-40 ~ +90	°C
Soldering Temperature	T _{sol}	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.	

Electronic Optical Characteristics (T_A=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Φ	10	-----	14	lm	I _F =30mA
Viewing Angle	2 θ _{1/2}	-----	120	-----	deg	I _F =30mA
Forward Voltage	V _F	2.7	-----	3.4	V	I _F =30mA
Color Rendering Index	----	75	----	----	----	I _F =30mA
Reverse Current	I _R	-----	-----	50	uA	V _R =5V

Note:

1. Tolerance of Luminous Flux: ±11%
2. Tolerance of Forward Voltage: ±0.05V
3. Tolerance of Color Rendering Index : ± 2

Technical Data Sheet -Preliminary**Top View LEDs****45-21S/KK2C-B5063L1L4B12Z3/2T****Bin Range of Luminous Flux**

Bin	Min.	Max.	Unit	Condition
L1	10	11	lm	$I_F=30\text{mA}$
L2	11	12		
L3	12	13		
L4	13	14		

Bin Range of Forward Voltage

Groups	Bin	Min.	Max.	Unit	Condition
B12	34	2.7	2.8	V	$I_F=30\text{mA}$
	35	2.8	2.9		
	36	2.9	3.0		
	37	3.0	3.1		
	38	3.1	3.2		
	39	3.2	3.3		
	40	3.3	3.4		

Notes:

1. Tolerance of Luminous Flux: $\pm 11\%$
2. Tolerance of Forward Voltage : $\pm 0.05\text{V}$

Technical Data Sheet -Preliminary

Top View LEDs


45-21S/KK2C-B5063L1L4B12Z3/2T

Bin Range of Chromaticity Coordinate

$I_F=30mA$

CCT	Bin Code	CIE_x	CIE_y	CCT	Bin Code	CIE_x	CIE_y
6300K ~5650K	W5	0.3148	0.3444	5650K ~5000K	V5	0.3288	0.3569
		0.3288	0.3569			0.3469	0.3717
		0.3290	0.3451			0.3458	0.3592
		0.3160	0.3332			0.3290	0.3451
	W6	0.3160	0.3332		V6	0.3290	0.3451
		0.3290	0.3451			0.3458	0.3592
		0.3292	0.3313			0.3444	0.3442
		0.3175	0.3204			0.3292	0.3313

The CIE 1931 Chromaticity Diagram

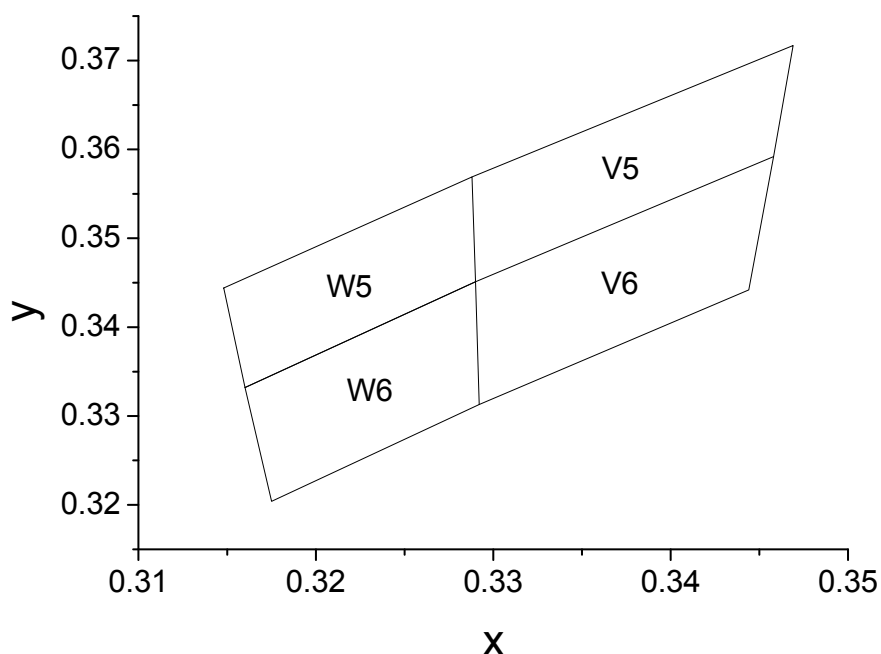


Technical Data Sheet -Preliminary

Top View LEDs

45-21S/KK2C-B5063L1L4B12Z3/2T

Typical Electro-Optical Characteristics Curves

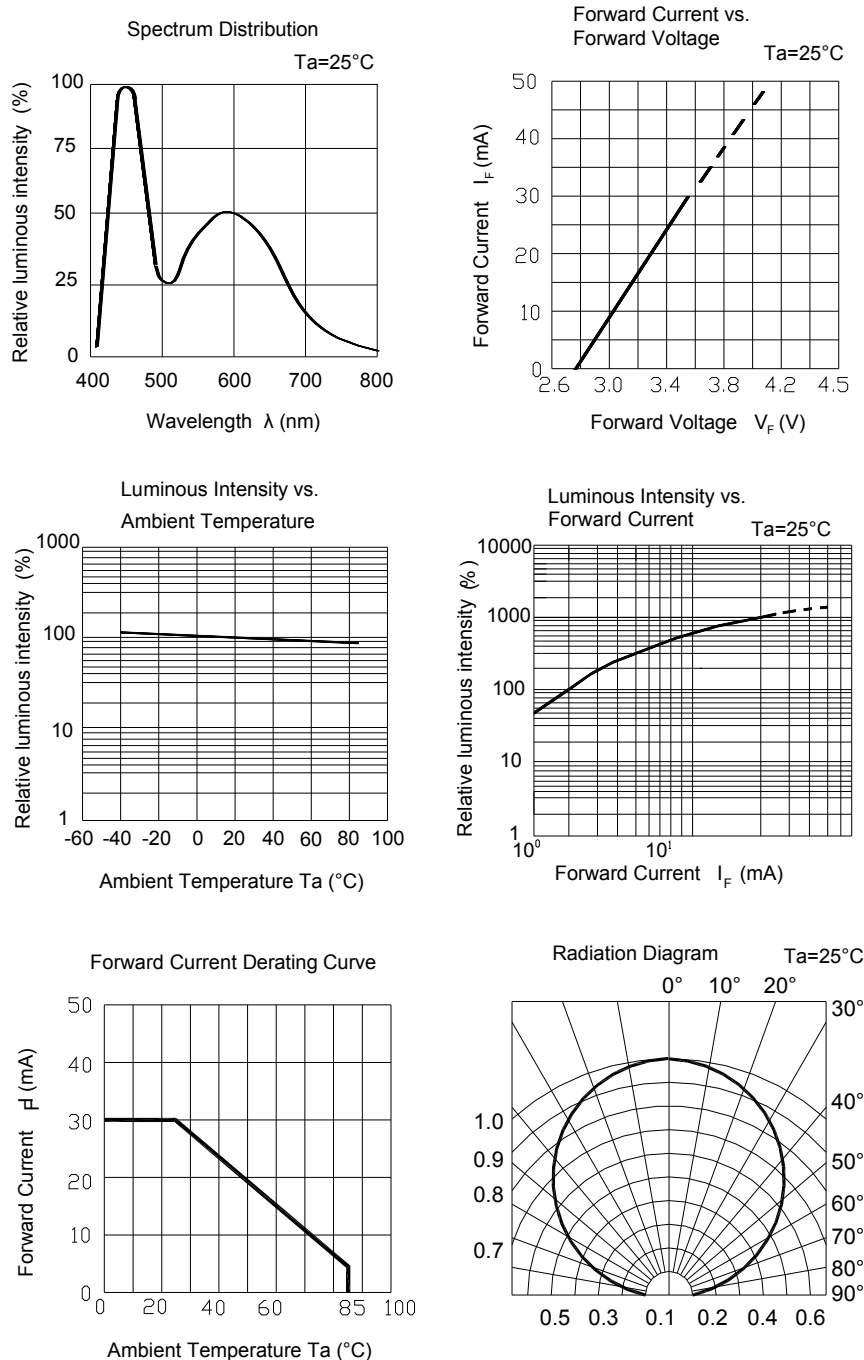

Technical Data Sheet -Preliminary

Top View LEDs


45-21S/KK2C-B5063L1L4B12Z3/2T

Label Explanation


CAT: Luminous Intensity Rank

HUE: Chromaticity Coordinates

REF: Forward Voltage Rank

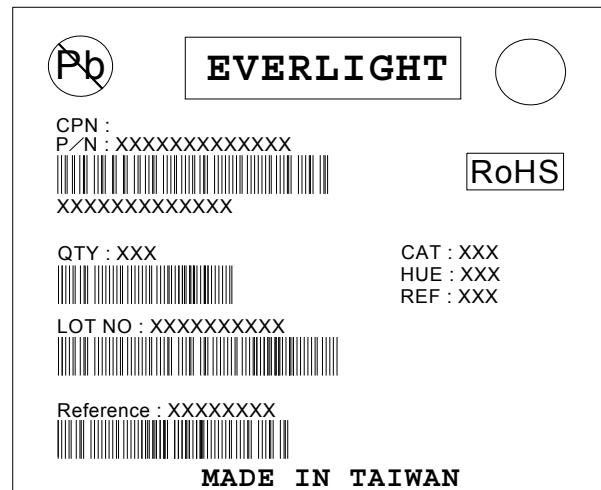

Reel Dimensions

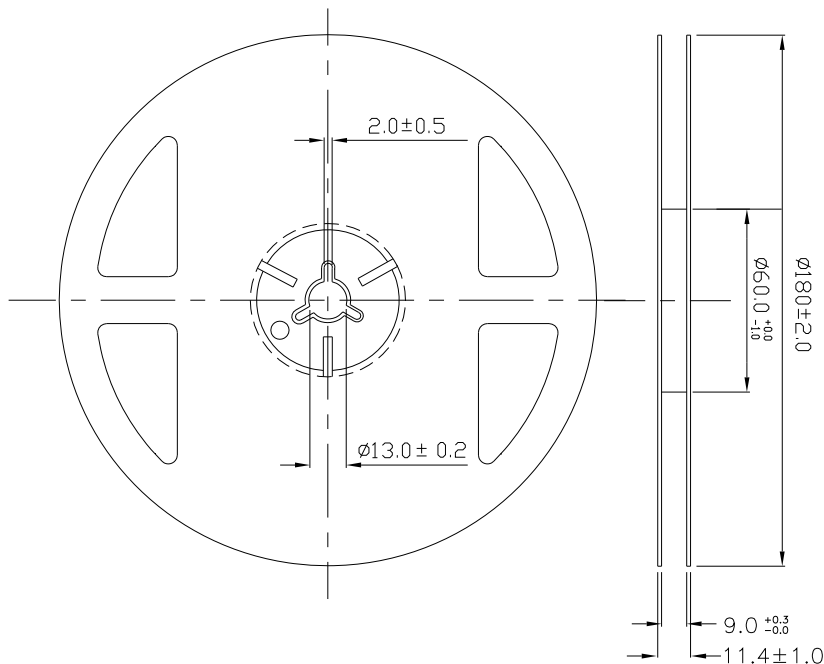


Note: The tolerances unless mentioned is : ± 0.1 mm, Unit = mm

Technical Data Sheet -Preliminary

Top View LEDs


45-21S/KK2C-B5063L1L4B12Z3/2T

Carrier Tape Dimensions; Loaded Quantity 2000 pcs Per Reel

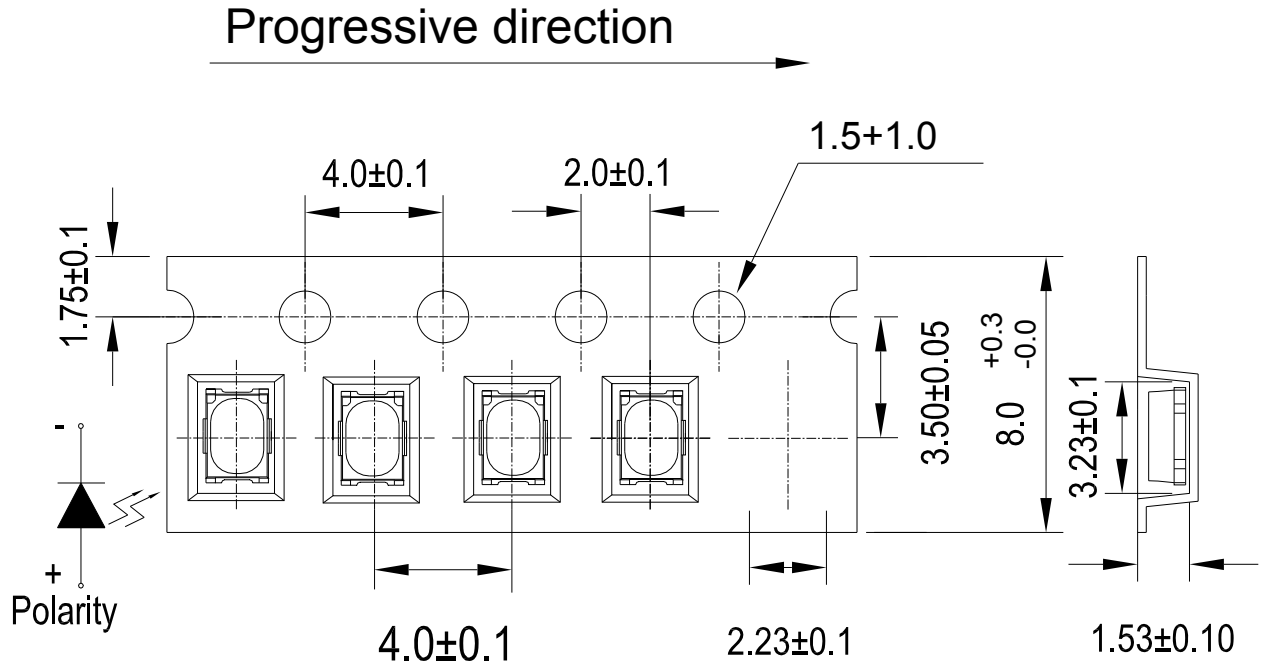

- Note:** 1.The tolerances unless mentioned is : ± 0.1 mm, Unit = mm
2.Minimum packing amount is 250/500/1000/2000 pcs per reel

Moisture Resistant Packaging

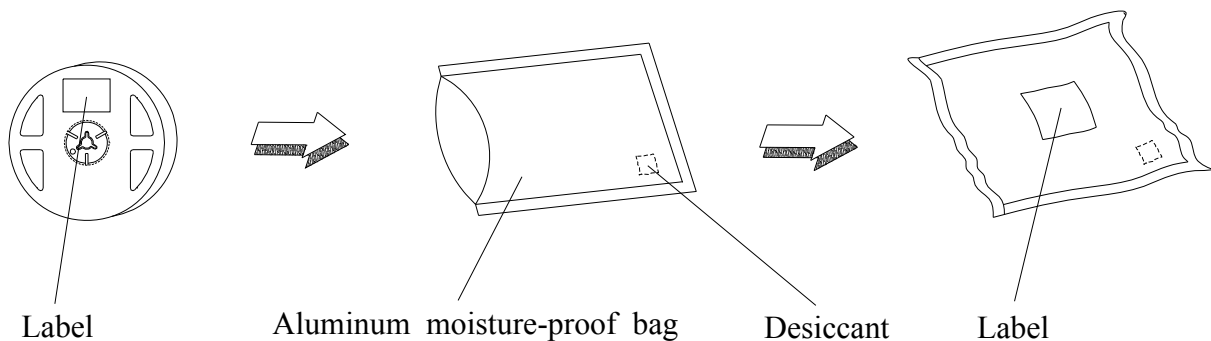

Technical Data Sheet -Preliminary

Top View LEDs

45-21S/KK2C-B5063L1L4B12Z3/2T

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Max. 10 sec.	6 Min.	22 PCS	0/1
2	Temperature Cycle	H : +100°C 15min ↓ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100°C 5min ↓ 10 sec L : -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	I _F = 20 mA / 25°C	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85%RH	1000 Hrs.	22 PCS.	0/1

Technical Data Sheet -Preliminary

Top View LEDs

45-21S/KK2C-B5063L1L4B12Z3/2T

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.


2.3 After opening the package: The LED's floor life is 168hrs under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5°C for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

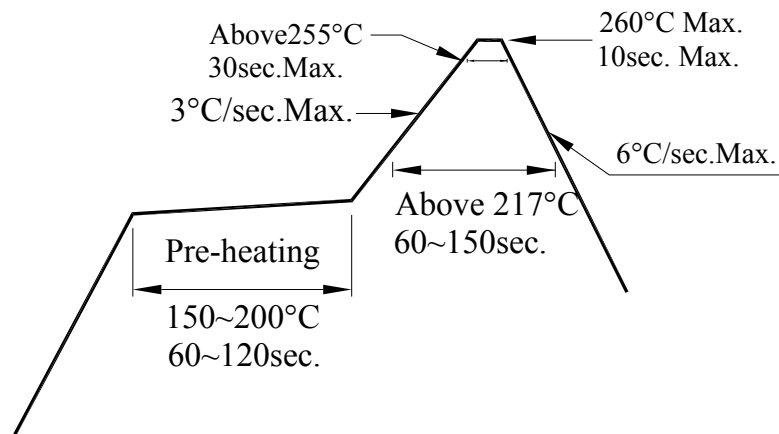

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.

3.4 After soldering, do not warp the circuit board.

Technical Data Sheet -Preliminary

Top View LEDs


45-21S/KK2C-B5063L1L4B12Z3/2T

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

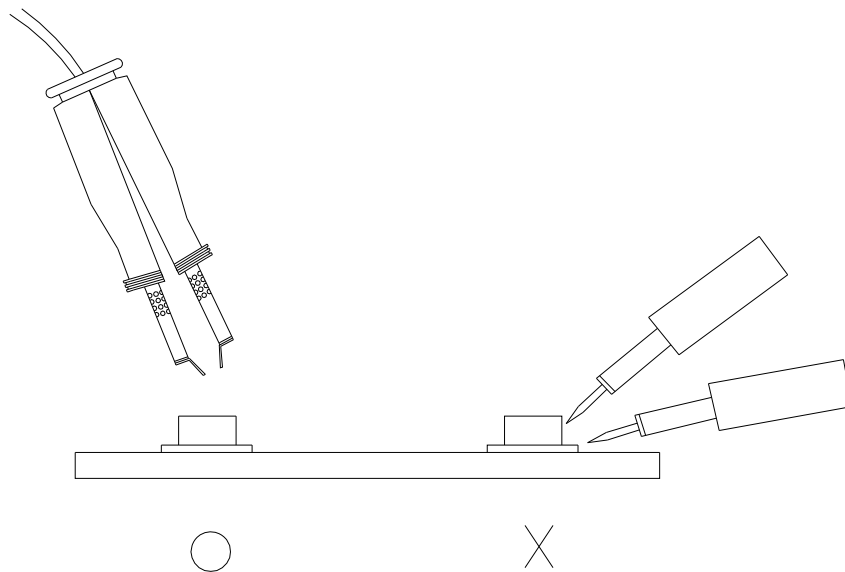

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

<http://www.everlight.com>