
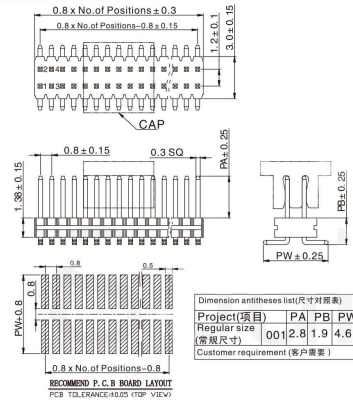


0.8mm Pin Header Dual Row SMT 双排 SMT

**Material (材料)>>>**

Plastic material ( 塑胶材质 ) : PA6T/PA9T+30%G.F  
Color (颜色) : Black、Special  
Insulator Material ( 绝缘材料 ): Polyester(UL94V-0)  
Contact Material ( 接触材料 ): Brass  
Contact Plating ( 接触电镀 ): Au Or Sn over 40u" Ni


003-01

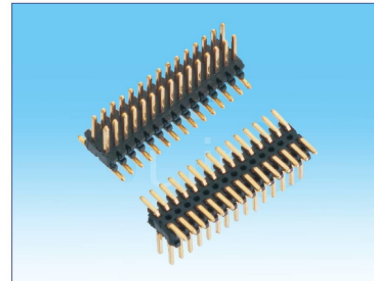

**SPECIFICATIONS (规范)>>>**

Current Rating ( 额定电流 ) : 0.75Amps  
Withstanding Voltage ( 耐电压 ) : AC 500V/min/Minute  
Insulation Resistance ( 绝缘电阻 ) : 1000MΩ Min  
Contact Resistance ( 接触电阻 ) : 20 mΩ MAX  
Operation Temperature ( 工作温度 ) : -40°C to +105°C

003-02

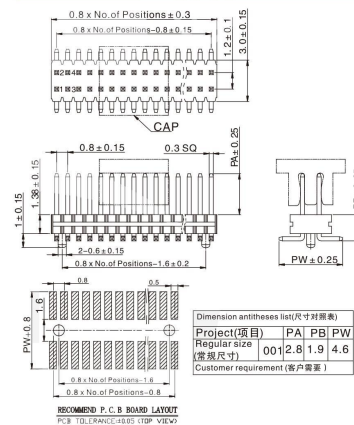

**Material code(物料编码)>>>**

<b>P</b>	<b>080</b>	<b>2XX</b>	<b>M</b>	<b>B</b>	<b>A</b>	<b>XX</b>	<b>001</b>
品名	间距	Pin位	类型	材质	包装方式	电镀	尺寸
Type P=Pin Header	Pitch 080=0.80	No. of Rows 2x01-50Pin	Connector Type M=SMT	Insulator Material Option B=BK-PA6T C=BK-PA9T D=LCP S=Special	packing A=Bag B=Box C=Tube D=Tape Reel	Contact Plating SN: Tin G2: 1U" Gold G3: 3U" Gold G4: 5U" Gold G5: 10U" Gold G6: 15U" Gold Standard: G0	Size HWL/PA/PB/PD/PW

0.8mm Pin Header