



Material (材料)>>>

Plastic material (塑胶材质) : PA6T/PA9T+30%G.F
Color (颜色) : Black、Special
Insulator Material (绝缘材料): Polyester(UL94V-0)
Contact Material (接触材料): Brass
Contact Plating (接触电镀): Au Or Sn over 40u" Ni

007-01


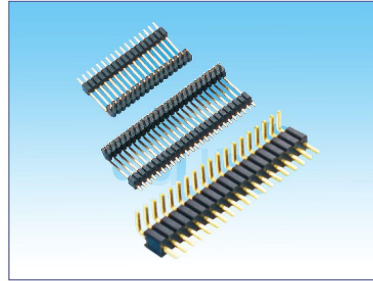


Dimension antitheses list(尺寸对照表)							
Project(项目)	H	W	L	PA	PB	PC	
Regular size (常规尺寸)	001	1.0	1.3	5.6	1.8	1.5	2.0
Customer requirement (客户需要)							

SPECIFICATIONS (规范)>>>

Current Rating (额定电流) : 0.75Amps
Withstanding Voltage (耐电压) : AC 500Vmin/Minute
Insulation Resistance (绝缘电阻) : 1000MΩ Min
Contact Resistance (接触电阻) : 20 mΩ MAX
Operation Temperature (工作温度) : -40°Cto+105°C

007-02

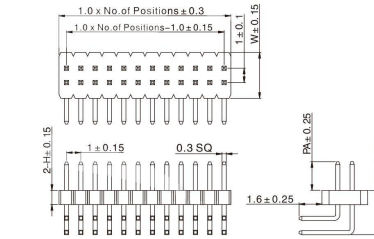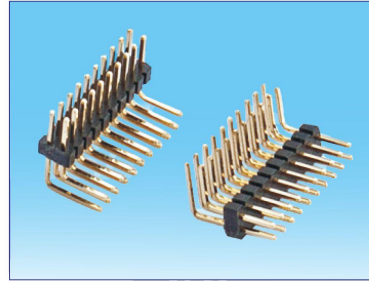

Dimension antitheses list(尺寸对照表)							
Project(项目)	H	W	L	PA	PB	PC	
Regular size (常规尺寸)	001	1.0	2.3	6.5	1.8	3.3	2.0
Customer requirement (客户需要)							

Material code(物料编码)>>>

P	100	XXX	R	B	A	XX	001
品名	间距	Pin位	类型	材质	包装方式	电镀	尺寸
Type P=Pin Header	Pitch 100=1.00	No. of Rows 1X01-50Pin 2x01-50Pin	Connector Type R=Right Angle	Insulator Material Option B=BK-PA6T C=BK-PA9T D=LCP S=Special	packing A=Bag B=Box C=Tube D=Tape Reel	Contact Plating SN: Tin G2: 1U"Gold G3: 3U"Gold G4: 5U"Gold G5: 10U"Gold G6: 15U"Gold Standard: Go	Size H/W/L/PA/PB/PC

1.0mm Pin Header