
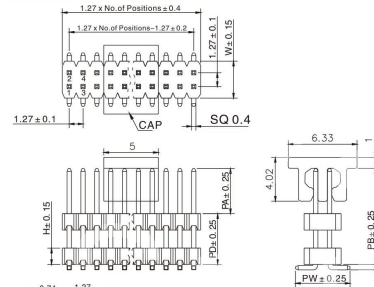


1.27mm Pin Header Dual Row SMT 双排SMT

Material (材料)>>>

Plastic material (塑胶材质) : PA6T/PA9T/LCP+30%G.F
Color (颜色) : Black, White, blue, Special
Insulator Material (绝缘材料): Polyester(UL94V-0)
Contact Material (接触材料): Brass
Contact Plating (接触电镀): Au Or Sn over 40u" Ni

017-01

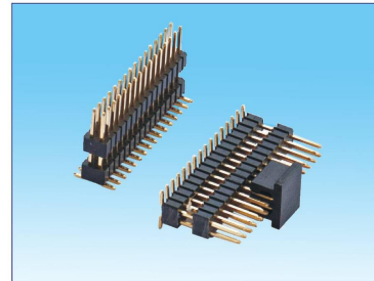



Dimension antitheses list(尺寸对照表)								
Project(项目)	H	W	L	PA	PB	PD	PW	
Regular size (常规尺寸)	001	2.0	3.0	14.0	4.0	0.5	7.9	5.5
Customer requirement (客户需要)								

RECOMMEND P.C.B BOARD LAYOUT FOR THROUGH-HOLE OR THE TYPE

SPECIFICATIONS (规范)>>>

Current Rating (额定电流) : 1.0Amps
Withstanding Voltage (耐电压) : AC 500Vmin/Minute
Insulation Resistance (绝缘电阻) : 1000MΩ Min
Contact Resistance (接触电阻) : 20 mΩ MAX
Operation Temperature (工作温度) : -40°Cto+105°C

017-02

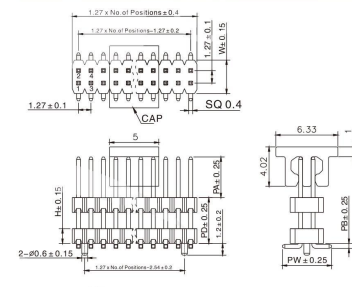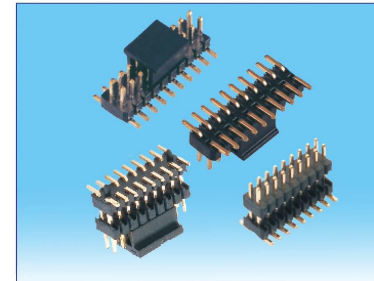

Dimension antitheses list(尺寸对照表)								
Project(项目)	H	W	L	PA	PB	PD	PW	
Regular size (常规尺寸)	001	2.0	3.0	14.0	4.0	0.5	7.9	5.5
Customer requirement (客户需要)								

RECOMMEND P.C.B BOARD LAYOUT FOR THROUGH-HOLE OR THE TYPE

Material code(物料编码)>>>

P	127	2XX	M	A	A	GO	001
品名	间距	Pin位	类型	材质	包装方式	电镀	尺寸
Type P=Pin Header	Pitch 127=1.27	No. of Rows 2x01-50Pin	Connector Type M=SMT	Insulator Material Option B=BK-PA6T C=BK-PA9T D=LCP S=Special	packing B=Box C=Tube D=Tape Reel	Contact Plating SN: Tin G0: Gold Flash G2: 1U" Gold G3: 3U" Gold G4: 5U" Gold G5: 10U" Gold G6: 15U" Gold Standard: G0	Size HW/L/PA/PB/PD/PW/Q

1.27mm Pin Header