
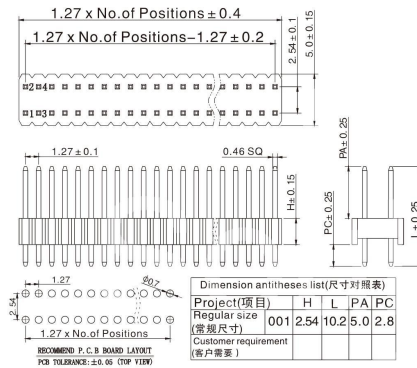


1.27x2.54mm Pin Header Dual Row Straight 双排180度

**Material (材料)>>>**

Plastic material ( 塑胶材质 ) : PA6T/PA9T/LCP+30%G.F  
Color (颜色) : Black, White, blue, Special  
Insulator Material ( 绝缘材料 ) : Polyester(UL94V-0)  
Contact Material ( 接触材料 ) : Brass  
Contact Plating ( 接触电镀 ) : Au Or Sn over 40u" Ni



019-01

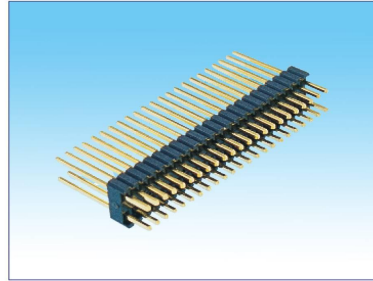

**SPECIFICATIONS (规范)>>>**

Current Rating ( 额定电流 ) : 1.0Amps  
Withstanding Voltage ( 耐电压 ) : AC 500Vmin/Minute  
Insulation Resistance ( 绝缘电阻 ) : 1000MΩ Min  
Contact Resistance ( 接触电阻 ) : 20 mΩ MAX  
Operation Temperature ( 工作温度 ) : -40°Cto+105°C

019-02

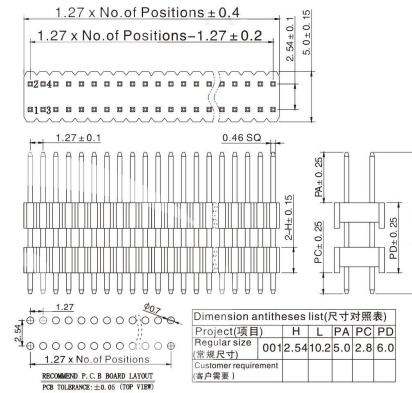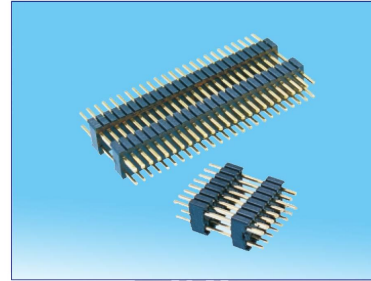

**Material code(物料编码)>>>**

<b>P</b>	<b>125</b>	<b>2XX</b>	<b>S</b>	<b>A</b>	<b>A</b>	<b>G0</b>	<b>001</b>
品名	间距	Pin位	类型	材质	包装方式	电镀	尺寸
Type P=Pin Header	Pitch 125=1.27x2.54	No. of Rows 2x01-50Pin	Connector Type S=Straight	Insulator Material Option C=BK-PA9T D=LCP S=Special	packing A=Bag B=Box C=Tube D=Tape Reel	Contact Plating SN: Tin G0: Gold Flash G2: 1U"Gold G3: 3U"Gold G4: 5U"Gold G5: 10U"Gold G6: 15U"Gold Standard:G0	Size H/L/PA/PB/PW/Q

1.27mm Pin Header