
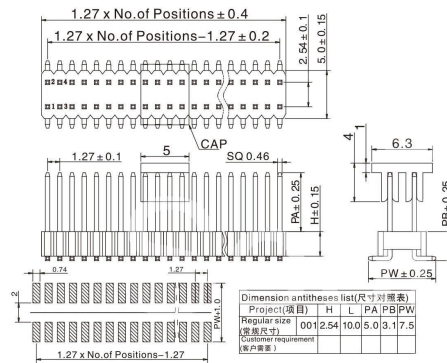


1.27x2.54mm Pin Header Dual Row SMT 双排 SMT

Material (材料)>>>

Plastic material (塑胶材质) : PA6T/PA9T/LCP+30%G.F
Color (颜色) : Black, White, blue, Special
Insulator Material (绝缘材料): Polyester(UL94V-0)
Contact Material (接触材料): Brass
Contact Plating (接触电镀): Au Or Sn over 40u" Ni



021-01

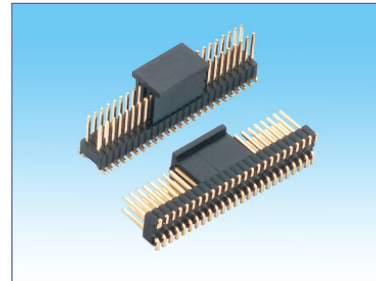

SPECIFICATIONS (规范)>>>

Current Rating (额定电流) : 1.0Amps
Withstanding Voltage (耐电压) : AC 500Vmin/Minute
Insulation Resistance (绝缘电阻) : 1000MΩ Min
Contact Resistance (接触电阻) : 20 mΩ MAX
Operation Temperature (工作温度) : -40°Cto+105°C

021-02

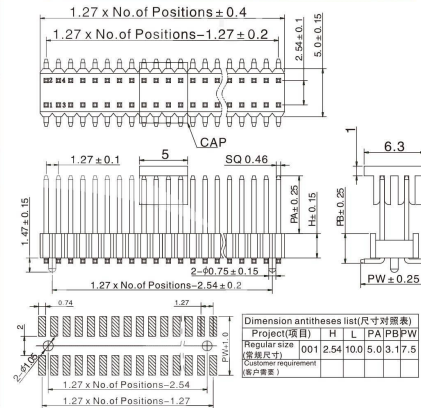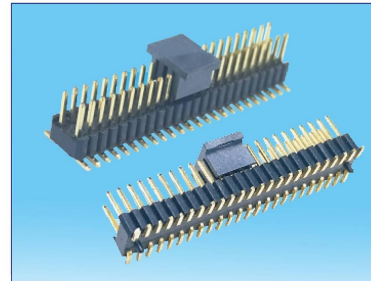

Material code(物料编码)>>>

P	125	2XX	M	A	X	G0	001
品名	间距	Pin位	类型	材质	包装方式	电镀	尺寸
Type P=Pin Header	Pitch 125=1.27x2.54	No. of Rows 2x01-50Pin	Connector Type M=SMT	Insulator Material Option C=BK-PA9T D=LCP S=Special	packing B=Box C=Tube D=Tape Reel	Contact Plating SN: Tin G0: Gold Flash G2: 1U"Gold G3: 3U"Gold G4: 5U"Gold G5: 10U"Gold G6: 15U"Gold Standard: G0	Size H/L/PA/PB/PW/Q

1.27mm Pin Header