
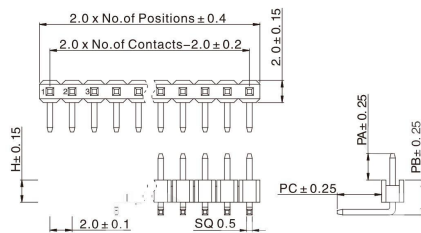


**Material (材料)>>>**

Plastic material ( 塑胶材质 ) : PA6T/PA9T/LCP+30%G.F  
Color (颜色) : Black, White, blue, Special  
Insulator Material ( 绝缘材料 ) : Polyester(UL94V-0)  
Contact Material ( 接触材料 ) : Brass  
Contact Plating (接触电镀): Au Or Sn over 40u" Ni

027-01

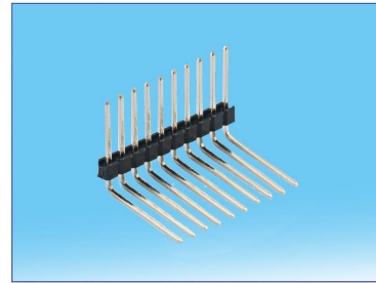


Dimension antitheses list(尺寸对照表)		Project(项目)	H	L	PA	PB	PC
Regular size (常规尺寸)	001	2.0	10.5	2.8	3.25	4.0	
Customer requirement (客户需要)							

**SPECIFICATIONS (规范)>>>**

Current Rating ( 额定电流 ) : 1.5Amps  
Withstanding Voltage ( 耐电压 ) : AC 500Vmin/Minute  
Insulation Resistance ( 绝缘电阻 ) : 1000MΩ Min  
Contact Resistance ( 接触电阻 ) : 20 mΩ MAX  
Operation Temperature ( 工作温度 ) : -40°Cto+105°C

027-02

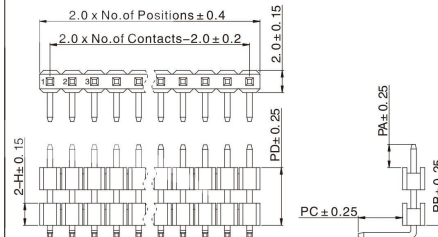

Dimension antitheses list(尺寸对照表)		Project(项目)	H	L	PA	PB	PC	PD
Regular size (常规尺寸)	001	2.0	11.8	2.8	0.5	4.0	4.0	
Customer requirement (客户需要)								

**Material code(物料编码)>>>**

<b>P</b>	<b>20</b>	<b>XXX</b>	<b>R</b>	<b>A</b>	<b>A</b>	<b>G0</b>	<b>001</b>
品名	间距	Pin位	类型	材质	包装方式	电镀	尺寸
Type P=Pin Header	Pitch 20=2.0	No. of Rows 1x01-40Pin	Connector Type R=Right Angle	Insulator Material Option B=BK-PA6T C=BK-PA9T D=LCP S=Special	packing A=Bag B=Box C=Tube D=Tape Reel	Contact Plating SN: Tin G0: Gold Flash G2: 1U" Gold G3: 3U" Gold G4: 5U" Gold G5: 10U" Gold G6: 15U" Gold Standard: G0	Size H/L/PA/PC/PD

2.00mm Pin Header