



Material (材料)>>>

Plastic material (塑胶材质) : PA6T/PA9T/LCP+30%G.F
Color (颜色) : Black、White、blue、Special
Insulator Material (绝缘材料) : Polyester(UL94V-0)
Contact Material (接触材料) : Brass
Contact Plating (接触电镀) : Au Or Sn over 40u" Ni



SPECIFICATIONS (规范)>>>

Current Rating (额定电流) : 1.5Amps
Withstanding Voltage (耐电压) : AC 500Vmin/Minute
Insulation Resistance (绝缘电阻) : 1000MΩ Min
Contact Resistance (接触电阻) : 20 mΩ MAX
Operation Temperature (工作温度) : -40℃to+105℃

030-01

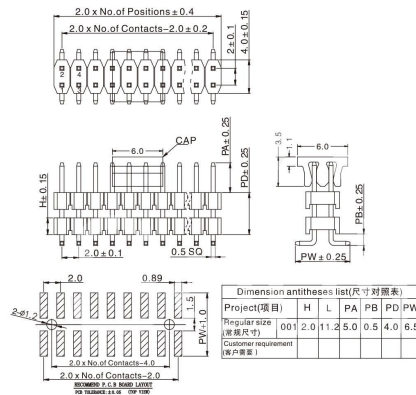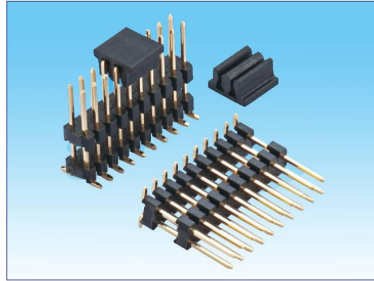

030-02

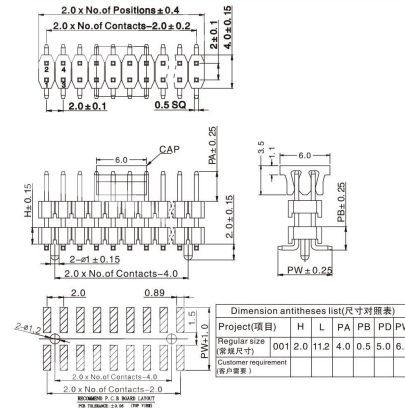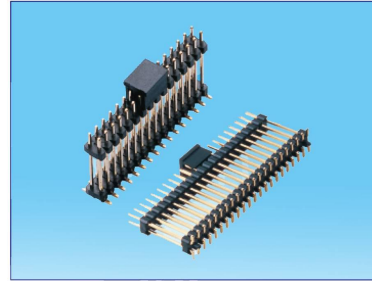

Material code(物料编码)>>>

| | | | | | | | |
|----------------------|-----------------|--------------------------|-------------------------|--|--|---|----------------------|
| P | 20 | 2XX | M | A | A | GO | 001 |
| 品名 | 间距 | Pin位 | 类型 | 材质 | 包装方式 | 电镀 | 尺寸 |
| Type P=Pin Header | Pitch 20=2.0 | No.of Rows 2x01-40Pin | Connector Type M=SMT | Insulator Material Option B=BK-PA6T C=BK-PA9T D=LCP S=Special | packing A=Bag B=Box C=Tube D=Tape Reel | Contact Plating SN:Tin G0:Gold Flash G2:1U"Gold G3:3U"Gold G4:5U"Gold G5:10U"Gold G6:15U"Gold Standard:GO | Size H/L/PA/PC/PD |

2.00mm Pin Header