

2.0mm Pin Header Single/Dual Row Side Entry Single Row
Right Angle 单双排 侧插 90度



Material (材料)>>>

Plastic material (塑胶材质) : PA6T/PA9T/LCP+30%G.F
Color (颜色) : Black, White, blue, Special
Insulator Material (绝缘材料) : Polyester(UL94V-0)
Contact Material (接触材料) : Brass
Contact Plating (接触电镀) : Au Or Sn over 40u" Ni

SPECIFICATIONS (规范)>>>

Current Rating (额定电流) : 1.5Amps
Withstanding Voltage (耐电压) : AC 500Vmin/Minute
Insulation Resistance (绝缘电阻) : 1000MΩ Min
Contact Resistance (接触电阻) : 20 mΩ MAX
Operation Temperature (工作温度) : -40°Cto+105°C



035-01

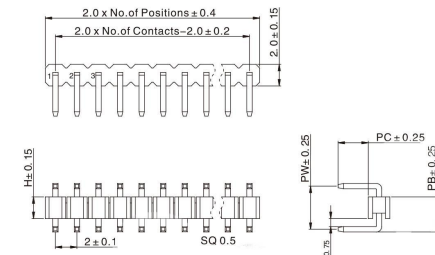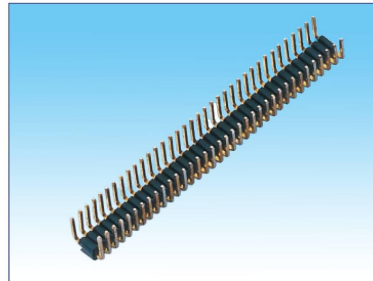

Project(项目)	H	L	PB	PC	PW
Regular size (常规尺寸)	001	2.0	3.25	2.8	4.0
Customer requirement (客户要求)					

RECOMMEND P. C. B BOARD LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

035-02

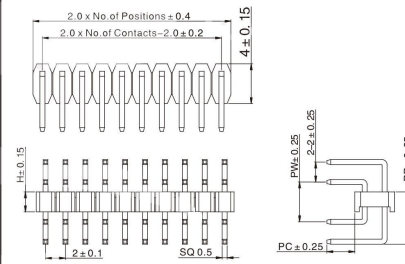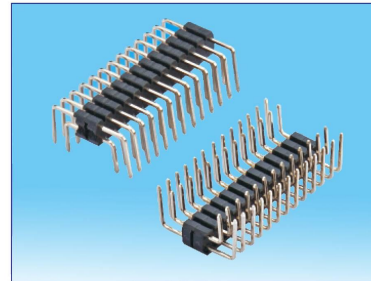

Project(项目)	H	L	PB	PC	PW
Regular size (常规尺寸)	001	2.0	5.25	2.8	4.0
Customer requirement (客户要求)					

RECOMMEND P. C. B BOARD LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

Material code(物料编码)>>>

P	20	XXX	R	A	A	G0	001
品名	间距	Pin位	类型	材质	包装方式	电镀	尺寸
Type P=Pin Header	Pitch 20=2.0	No. of Rows 1x01-40Pin 2x01-40Pin	Connector Type R=Right Angle	Insulator Material Option B=BK-PA6T C=BK-PA9T D=LCP S=Special	packing A=Bag B=Box C=Tube D=Tape Reel	Contact Plating SN: Tin G0: Gold Flash G2: 1U" Gold G3: 3U" Gold G4: 5U" Gold G5: 10U" Gold G6: 15U" Gold Standard: G0	Size H/L/PA/PB/PC/PD

2.00mm Pin Header