
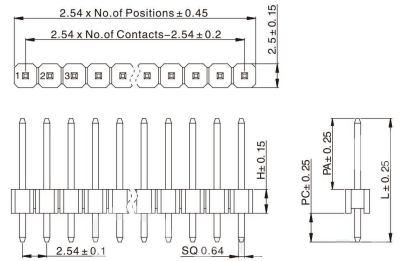


2.54mm Pin Header Single Row Straight 单排 180度

Material (材料)>>>

Plastic material (塑胶材质) : PBT/PA6T/PA9T/LCP+30%G.F
Color (颜色): Black, White, blue
Insulator Material(绝缘材料): Polyester(UL94V-0)
Contact Material (接触材料) : Brass
Contact Plating (接触电镀): Au Or Sn over 40u* Ni

037-01

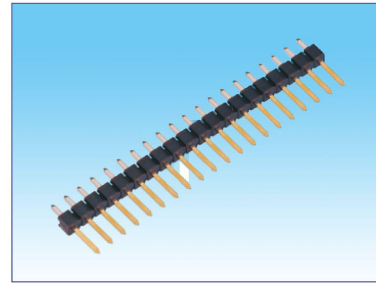



Dimension anitheses list(尺寸对照表)					
Project(项目)	H	L	PA	PC	
Regular size (标准尺寸)	001	2.5	11.5	6.0	3.0
Customer requirement (客户需要)					

RECOMMEND P.C.B BOARD LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

SPECIFICATIONS (规范)>>>

Current Rating (额定电流): 3.0 Amps
Withstanding Voltage (耐电压) : AC 1000Vmin/Minute
Insulation Resistance(绝缘电阻): 1000MΩ Min
Contact Resistance (接触电阻): 20 mΩ MAX
Operation Temperature(工作温度): -40°Cto+105°C

037-02

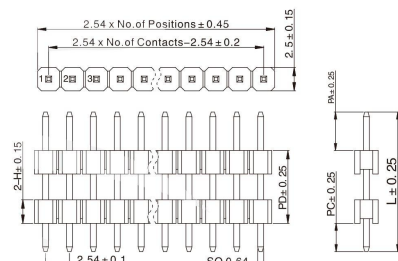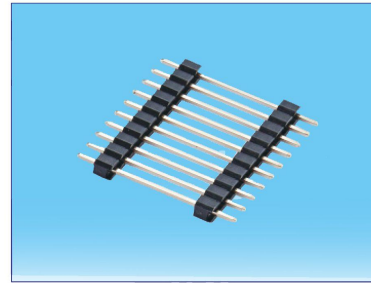

Dimension anitheses list(尺寸对照表)					
Project(项目)	H	L	PA	PC	
Regular size (标准尺寸)	001	2.5	14.0	6.0	5.0
Customer requirement (客户需要)					

RECOMMEND P.C.B BOARD LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

Material code(物料编码)>>>

P	254	1XX	S	X	A	G0	001
品名	间距	Pin位	类型	材质	包装方式	电镀	尺寸
Type P=Pin Header	Pitch 2.54=254	No. of Rows 1x01-40Pin	Connector Type S=Straight	Insulator Material Option A=BK-PBT B=BK-PA6T C=BK-PA9T D=LCP S=Special	packing A=Bag B=Box C=Tube D=Tape Reel	Contact Plating S=Ni-Tin G0:Gold Flash G2:1U*Gold G3:3U*Gold G4:5U*Gold G5:10U*Gold G6:15U*Gold Standard:G0	Size H/L/PA/PB/PC

2.54mm Pin Header