
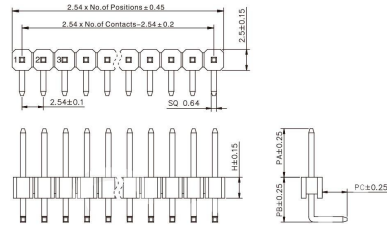


Material (材料)>>>

Plastic material (塑胶材质) : PBT/PA6T/PA9T/LCP+30%G.F
Color (颜色): Black, White, blue
Insulator Material(绝缘材料): Polyester(UL94V-0)
Contact Material (接触材料) : Brass
Contact Plating (接触电镀) : Au Or Sn over 40u* Ni

040-01

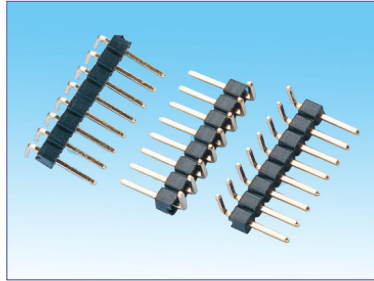



Dimension antitheses list(尺寸对照表)						
Project(项目)	H	L	PA	PB	PC	PD
Regular size(常规尺寸)	001	2.5	13.8	6.0	4.4	3.0
Customer requirement(客户需要)						

RECOMMEND P.C.B BOARD LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

SPECIFICATIONS (规范)>>>

Current Rating (额定电流): 3.0 Amps
Withstanding Voltage (耐电压) : AC 1000Vmin/Minute
Insulation Resistance(绝缘电阻): 1000MΩ Min
Contact Resistance (接触电阻) : 20 mΩ MAX
Operation Temperature(工作温度): -40°Cto+105°C

040-02

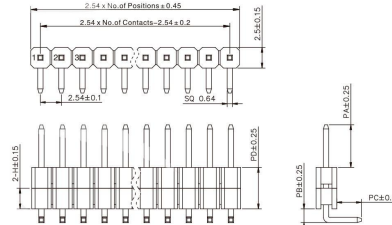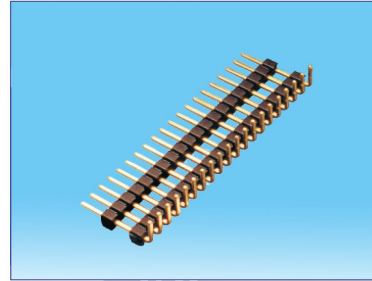

Dimension antitheses list(尺寸对照表)						
Project(项目)	H	L	PA	PB	PC	PD
Regular size(常规尺寸)	001	2.5	15.2	6.0	0.65	3.0
Customer requirement(客户需要)						

RECOMMEND P.C.B BOARD LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

2.54mm Pin Header

Material code(物料编码)>>>

P	254	XXX	R	X	A	G0	001
品名	间距	Pin位	类型	材质	包装方式	电镀	尺寸
Type P=Pin Header	Pitch 2.54=254	No.of Rows 1x01-40Pin	Connector Type R=Right Angle	Insulator Material Option A=BK-PBT B=BK-PA6T C=BK-PA9T D=LCP S=Special	packing A=Bag B=Box C=Tube D=Tape Reel	Contact Plating SN: Tin G0: Gold Flash G2: 1U" Gold G3: 3U" Gold G4: 5U" Gold G5: 10U" Gold G6: 15U" Gold Standard: G0	Size H/L/PA/PB/PC/PD