



Material (材料)>>>

Plastic material (塑胶材质) : PBT/PA6T/PA9T/LCP+30%G.F
Color (颜色): Black, White, blue
Insulator Material(绝缘材料): Polyester(UL94V-0)
Contact Material (接触材料) : Brass
Contact Plating (接触电镀): Au Or Sn over 40u" Ni



SPECIFICATIONS (规范)>>>

Current Rating (额定电流): 3.0 Amps
Withstanding Voltage (耐电压) : AC 1000Vmin/Minute
Insulation Resistance(绝缘电阻): 1000MΩ Min
Contact Resistance (接触电阻): 20 mΩ MAX
Operation Temperature(工作温度): -40°Cto+105°C

041-01

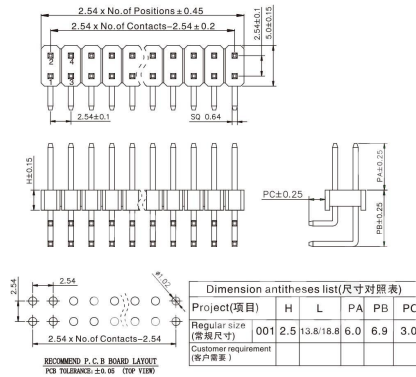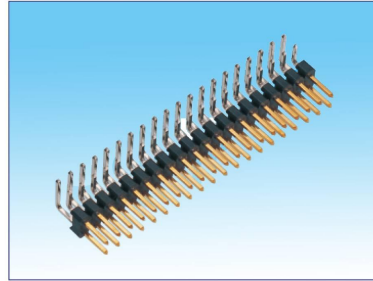

041-02

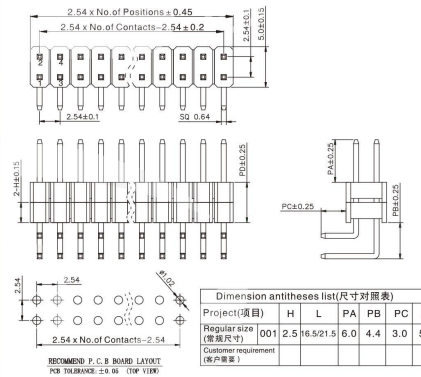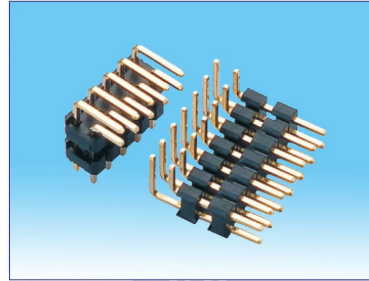

Material code(物料编码)>>>

P	254	2XX	R	X	X	G0	001
品名	间距	Pin位	类型	材质	包装方式	电镀	尺寸
Type P=Pin Header	Pitch 2.54=254	No.of Rows 2x01-40Pin	Connector Type R=Right Angle	Insulator Material Option A=BK-PBT B=BK-PA6T C=BK-PA9T D=LCP S=Special	packing A=Bag B=Box C=Tube D=Tape Reel	Contact Plating SN:1in G0:Gold Flash G2:1U"Gold G3:3U"Gold G4:5U"Gold G5:10U"Gold G6:15U"Gold Standard:G0	Size H/L/PA/PB/PC/PD

2.54mm Pin Header