
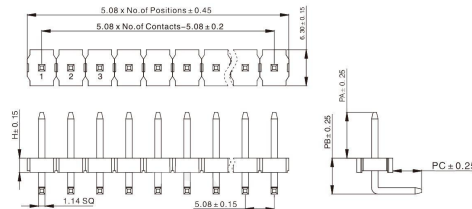


Material (材料)>>>

Plastic material (塑胶材质) : PA9T/LCP+30%G.F
Color (颜色): Black
Insulator Material (绝缘材料) : Polyester(UL94V-0)
Contact Material (接触材料) : Brass
Contact Plating (接触电镀) : Au Or Sn over 40u" Ni
059-01


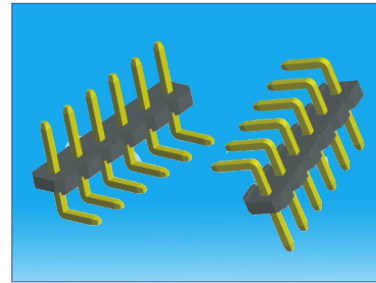


| Dimension antitheses list(尺寸对照表) | | | | | | |
|----------------------------------|-----|-----|-----|------|-----|----|
| Project(项目) | H | L | PA | PB | PC | PD |
| Regular size (常规尺寸) | 001 | 2.5 | 8.5 | 9.99 | 3.5 | |
| Customer requirement (客户要求) | | | | | | |

RECOMMEND P. C. B BOARD LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

SPECIFICATIONS (规范)>>>

Current Rating(额定电流) : 7.0 Amps
Withstanding Voltage(耐电压) : AC 500Vmin/Minute
Insulation Resistance(绝缘电阻) : 1000MΩ Min
Contact Resistance (接触电阻) : 20 mΩ MAX
Operation Temperature(工作温度) : -40°Cto+105°C
059-02

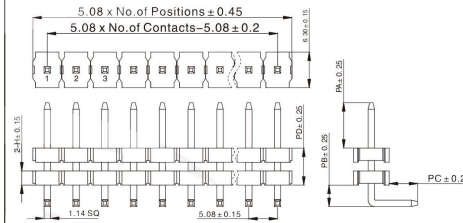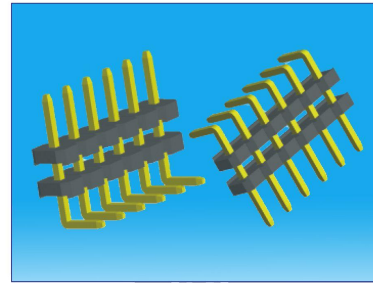

| Dimension antitheses list(尺寸对照表) | | | | | | |
|----------------------------------|-----|-----|-----|------|-----|-----|
| Project(项目) | H | L | PA | PB | PC | PD |
| Regular size (常规尺寸) | 001 | 2.5 | 8.5 | 3.14 | 3.5 | 5.0 |
| Customer requirement (客户要求) | | | | | | |

RECOMMEND P. C. B BOARD LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

Material code(物料编码)>>>

| | | | | | | | |
|----------------------|-------------------|---------------------------|---------------------------------|---|--|---|----------------------|
| P | 508 | 1XX | S | A | A | SN | 001 |
| 品名 | 间距 | Pin位 | 类型 | 材质 | 包装方式 | 电镀 | 尺寸 |
| Type P=Pin Header | Pitch 5.08=508 | No. of Rows 1x01-20Pin | Connector Type R=Right Angle | Insulator Material Option C=BK-PA9T D=LCP S=Special | packing A=Bag B=Box C=Tube D=Tape Reel | Contact Plating SN: Tin G0: Gold Flash G2: 1U"Gold G3: 3U"Gold G4: 5U"Gold G5: 10U"Gold G6: 15U"Gold Standard: G0 | Size H/L/PA/PC/PD |

5.08mm Pin Header