
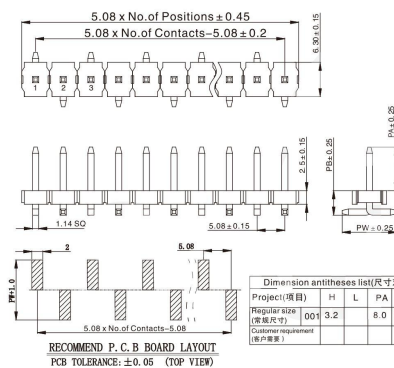


**Material (材料)>>>**

Plastic material ( 塑胶材质 ) : PA9T/LCP+30%G.F  
Color (颜色): Black  
Insulator Material (绝缘材料) : Polyester(UL94V-0)  
Contact Material ( 接触材料 ) : Brass  
Contact Plating ( 接触电镀 ) : Au Or Sn over 40u" Ni



060-01

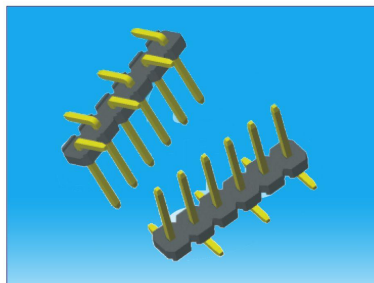

**SPECIFICATIONS (规范)>>>**

Current Rating(额定电流) : 7.0 Amps  
Withstanding Voltage(耐电压) : AC 500Vmin/Minute  
Insulation Resistance(绝缘电阻) : 1000MΩ Min  
Contact Resistance (接触电阻) : 20 mΩ MAX  
Operation Temperature(工作温度) : -40°Cto+105°C

060-02

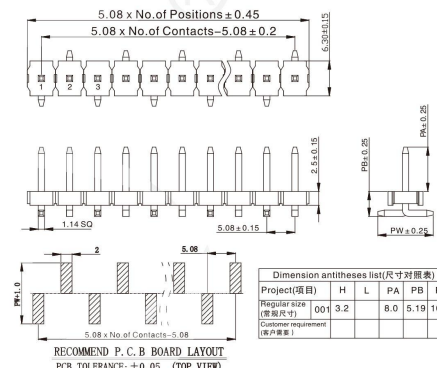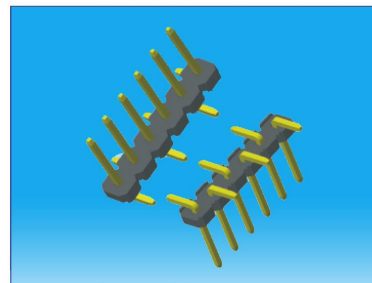

5.08mm Pin Header

**Material code(物料编码)>>>**

<b>P</b>	<b>508</b>	<b>1XX</b>	<b>S</b>	<b>A</b>	<b>A</b>	<b>SN</b>	<b>001</b>
品名	间距	Pin位	类型	材质	包装方式	电镀	尺寸
Type P=Pin Header	Pitch 5.08=508	No. of Rows 1x01-20Pin	Connector Type M=SMT	Insulator Material Option C=BK-PA9T D=LCP S=Special	packing A=Bag B=Box C=Tube D=Tape Reel	Contact Plating SN: Tin G0: Gold Flash G2: 1U"Gold G3: 3U"Gold G4: 5U"Gold G5: 10U"Gold G6: 15U"Gold Standard: G0	Size H/L/PA/PC/PD