Symbol (记号)	Item (项目)	Specification (规格)
N	No.of Conductor(导体数)	4P~40P
L	Total Length(总长度)	L±5
A	Insulation Length(绝缘长度)	(L−8)±5
TP	Total Pitch(总间距)	1.25x(N−1)Pin±0.08
W	Width(总宽度)	1.25xNpin+1.25±0.08
P	Pitch(间距)	1.25±0.03
M	Margin(边缘宽度)	1.25±0.05
T	Cable thickness(线材厚度)	0.121±0.05
T1	Insert thickness(插入厚度)	0.303±0.05
C1/C2	Conductor Strip Length(导体长度)	4.0±1.0
S1/S2	Supporting Tape Length(补强板长度)	8.0±2.0
T2	Conductor thickness(导体厚度)	0.05±0.005
B	Conductor Width(导体宽度)	0.80±0.03
E	Slanting(线口倾斜度)	<0.5
— —	Conductor Material(导体材料)	Tinned Copper 镀锡扁平铜线
— —	Insulation Material(绝缘材料)	Flame retardand polyester(阻燃)
— —	Supporting Tape Material(补强板材料)	PET
— —	Supporting Tape Color(补强板颜色)	蓝色 BLUE
— —	Supporting Tape Spec(补强板规格)	0.225mm

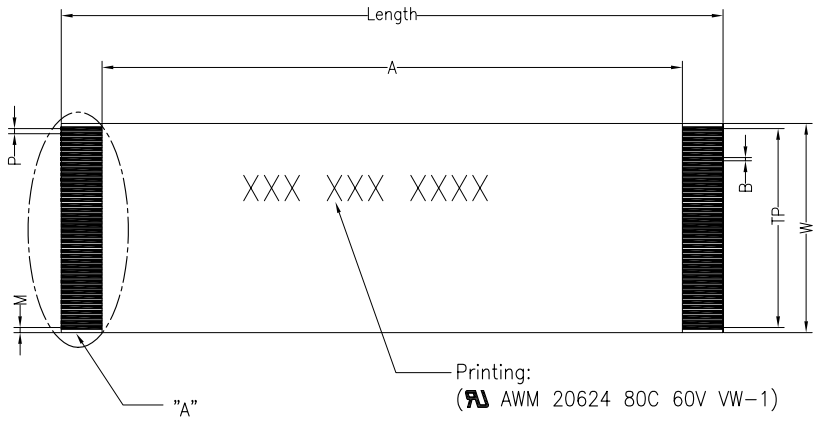

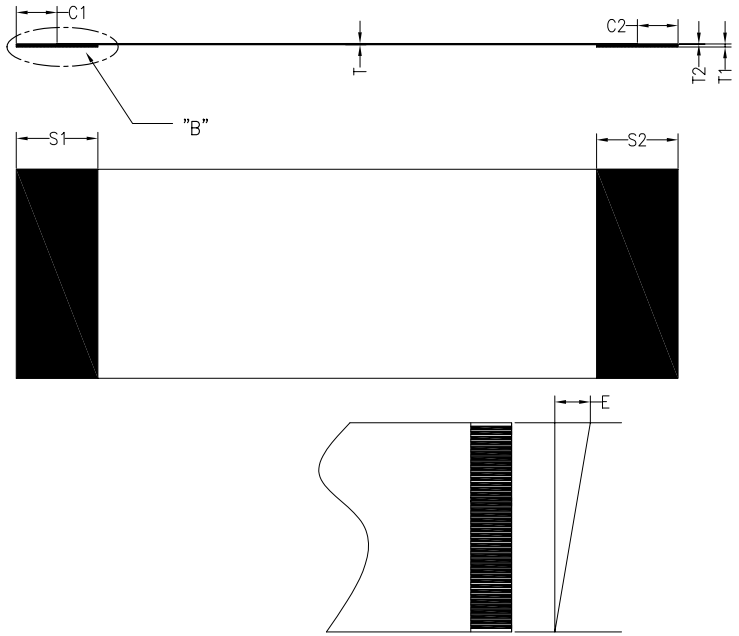

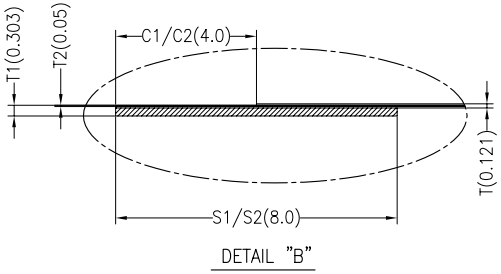

DETAIL "B"

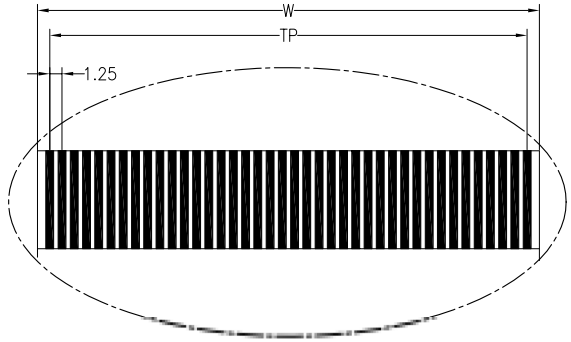

DETAIL "A"

Ordering Information

FFC - 12 XX XXX A 01

- 12 — Pitch: 12=1.25pitch
- XX — No.of Pins: 4P~40P
- XXX — Length: 100=100mm

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2014.06.12	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	YiYuSheng	14.06.12
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

東莞市宏尚電子有限公司
Dongguan Hongshang Electronics Co.,Ltd

PART NO.	FFC-12XXXXXA01
TITLE:	1.25 FFC Npin A-Type
Customer:	