

### 备注:

1. 材质及电镀: 见附表1

2. 电气性能:

2.1 接触电阻: 30mΩ Max

2.2 耐电压: 100V AC Min.

2.3 绝缘: 100MΩ Min

2.4 额定电流:

DC 30V Pin1,Pin 5: 1.8A Max.




Pin2,Pin3,Pin4: 1A Max.

3. 机械性能:

3.1 插入力: 3.5KG Max.

3.2 拔出力: 0.8KG Min.

3.3 寿命: 5000 次

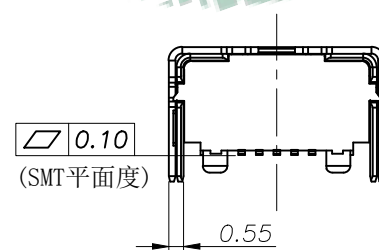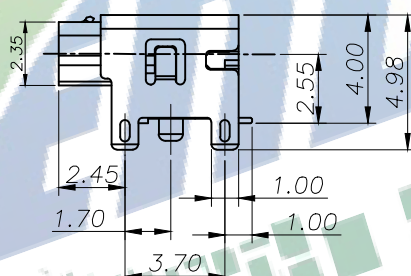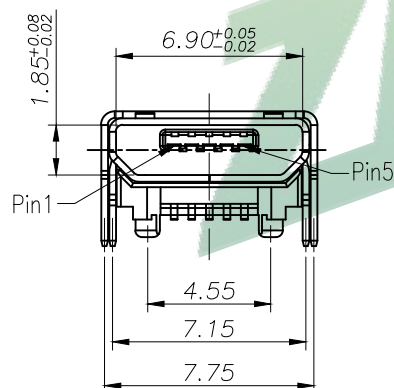

05	Molding件	LCP	1	黑色 UL94 V-0
04	外壳	SUS 304 T=0.25	1	镀镍
03	内壳	SUS 304 T=0.25	1	镀镍
01	端子	C2680-H T=0.20	1set	功能接触区镀金, 焊脚镀金
序号	品名	材质	用量	备注

<b>振端精密科技 (深圳) 有限公司</b> Zhenduan precision technology (Shenzhen) Co., Ltd			
TOLERANCE: XX ±0.30 XX ±0.20 XXX ±0.10 X ±0.05 X ±0.02 X ±0.01	DRAWN BY : 刘志强	DATE : 2015.08.18	PART NAME: MC5P母座四脚插板垫高2.5直边
CHECKED BY: 李文毅	DATE : 2015.08.18	PART NO.	SEE TABLE
APPROVED BY: 张少辉	DATE : 2015.08.18	MOLD NO.	
UNIT: mm [inch] SCALE: 1:1 SIZE: A4		DRAW NO:	ZDJNKM000132
		SHEET NO.	1 OF 1