



产品参数:

1. 额定负荷: DC 30V 0.1A
2. 接触电阻: 100m
3. 绝缘阻抗: AC 500V 1Minute
4. 使用温度: - 25 + 85
5. 操作力: 30 ± 15gf
6. 机械寿命: 3,000,000Cycles
7. 行程: 8.30 ± 0.30
8. 定制选择: AC 125V 1A-3A

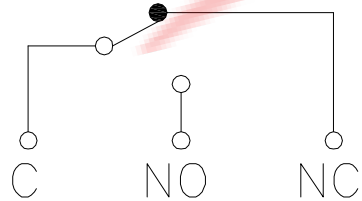

Circuit Diagram

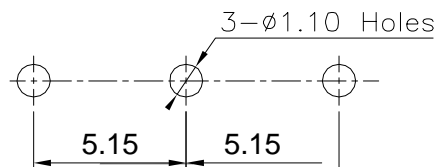

P.C.B layout

| ITEM | PART NAME | TER'NO. | QTY. | MATERIAL | FINISHING | REMARK |
|------|-----------|---------|------|------------------|----------------|--------|
| ⑥ | Shrapnel | — | 1 | Beryllium Copper | — | — |
| ⑤ | Contact | — | 1 | Ag | — | — |
| ④ | Terminal | — | 3 | Brass(0.52t) | Plating silver | — |
| ③ | Housing | — | 1 | PBT | White | — |
| ② | Knob | — | 1 | PBT | White | — |
| ① | Cover | — | 1 | PBT | Black | — |

| APPROVALS | | DATE | | ZDX 深圳市兆达鑫科技有限公司 Shenzhen Zhao Xin Technology Co., Ltd. | | |
|----------------|-------|------------|-------|--|----------------|--------------|
| DRAWN | 刘志强 | 2015.08.18 | | TITLE: | MICRO SWITCHES | |
| CHECKED | 李文毅 | 2015.08.18 | | PART NO. | | |
| APPROVALS | 张少辉 | 2015.08.18 | | UNIT: mm | SCALE: 1:1 | PROJ: |
| TOLERANCES ARE | 30~以上 | ±0.30 | ANGLE | DRAWING NO. | | SHEET 1 OF 1 |
| | 10~30 | ±0.20 | | | | |
| | 5~10 | ±0.15 | ±2' | | | |
| | ~ 5 | ±0.10 | | | | |

| ECN NO. | REV. | DATE. | DESCRIPTION. | CHANGE. | CHECK. | APPRO. |
|---------|------|-------|--------------|---------|--------|--------|
| | A | | NEW | | | |