

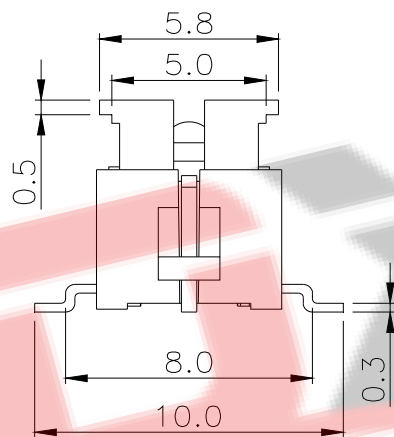
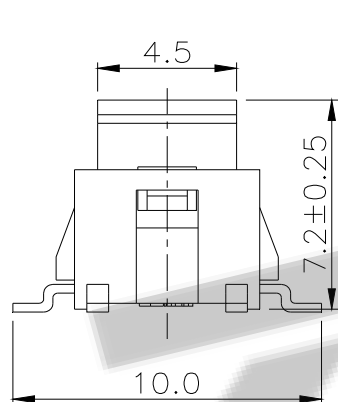



LED COLOR						
Red	Yellow	Green	Blue	White	Pure Green	Orange

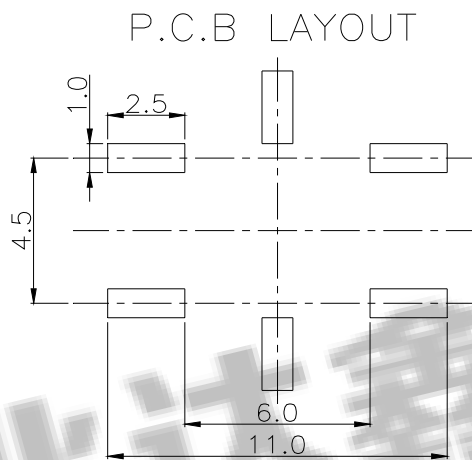

CIRCUIT



5	LED	GaAsP/GaP
4	TERMINAL	Bronze Silver Plated
3	CONTACT	PBS/SUS
2	BUTTON	PA66
1	HOUSING	PA66
ITEM	PART NAME	MATERIAL

- NOTES:
- 1.RATING: 12VDC 50mA
  - 2.CONTACT RESISTANCE: 100mΩ Max
  - 3.INSULATION RESISTANCE: 100MΩ 250VDC FOR 1MIN
  - 4.DIELECTRIC STRENGTH: 250VAC(50/60Hz) FOR 1MIN
  - 5.LIFE TEST:200,000 CYCLES
  - 6.OPERATION FORCE&TRAVEL: 250±80g / 0.25±0.1mm

TOLERANCE				TITLE: TACT SWITCH	
UNLESS OTHERWISE STATED				PART NO.: 5.8*5.8带灯SMT	
X	±0.15	$\angle$	±0.5°	MATL.:	UNIT: mm
X.X	±0.10	REV.	A	FINISH:	SCALE: 4:1
DRAWN	Heyf	2009/03/24			
CHK'D					
APPV'D					
A4	1 OF 1	$\oplus$	$\triangleleft$	深圳市兆达鑫科技有限公司 Shenzhen Zhao Xin Technology Co., Ltd.	

REV.	REVISION RECORD	DATE	REV.	REVISION RECORD	DATE
A		09.3.24			