


SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 50V AC, DC
- 3、Temperature Range:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance:  $20\text{m}\Omega$  Max
- 5、Insulation Resistance:  $100\text{M}\Omega$  Min
- 6、Withstanding Voltage: 500V AC/minute
- 7、Material: Wafer Nylon 6T, UL94V-0  
PIN Phosphoric bronze Tin-plated  
Solder pad Phosphoric bronze Tin-plated

编号	尺寸 (mm)		
	A	B	C
1.0-2AW	1.00	4.00	3.20
1.0-3AW	2.00	5.00	4.20
1.0-4AW	3.00	6.00	5.20
1.0-5AW	4.00	7.00	6.20
1.0-6AW	5.00	8.00	7.20
1.0-7AW	6.00	9.00	8.20
1.0-8AW	7.00	10.00	9.20
1.0-9AW	8.00	11.00	10.20
1.0-10AW	9.00	12.00	11.20
1.0-11AW	10.00	13.00	12.20
1.0-12AW	11.00	14.00	13.20
1.0-20AW	19.00	22.00	21.20

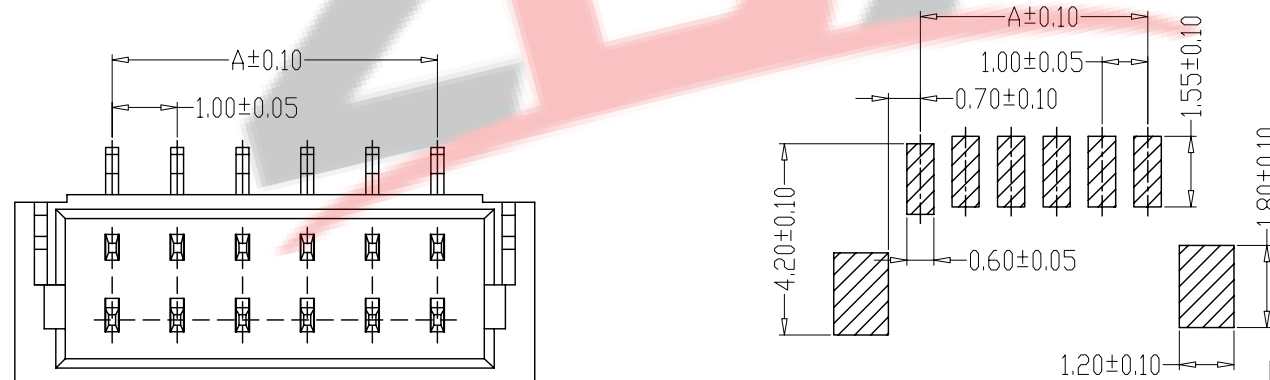

PCB LAYOUT

**ZDX** 深圳市兆达鑫科技有限公司  
Shenzhen Zhao Xin Technology Co., Ltd.

TOLERANCE: X.X $\pm 0.30$ X.XX $\pm 0.25$ X.XXX $\pm 0.15$ X' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 刘志强	DATE : 2016.05.08	PART NAME: 1.0单排 立贴	
	CHECKED BY : 罗秋海	DATE : 2016.05.08	PART NO.	SEE TABLE
UNIT: mm [inch] SCALE:1:1    SIZE: A4	APPROVED BY : 陈鸣杰	DATE : 2016.05.08	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1