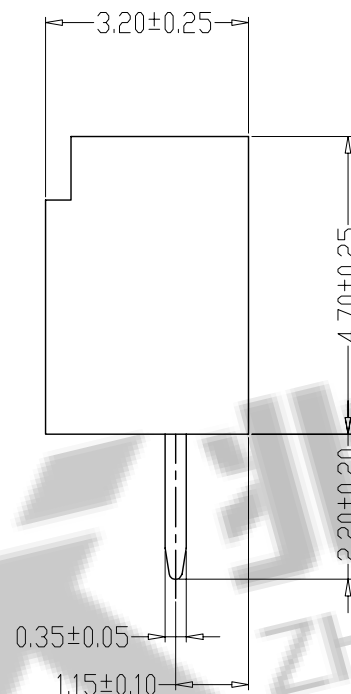
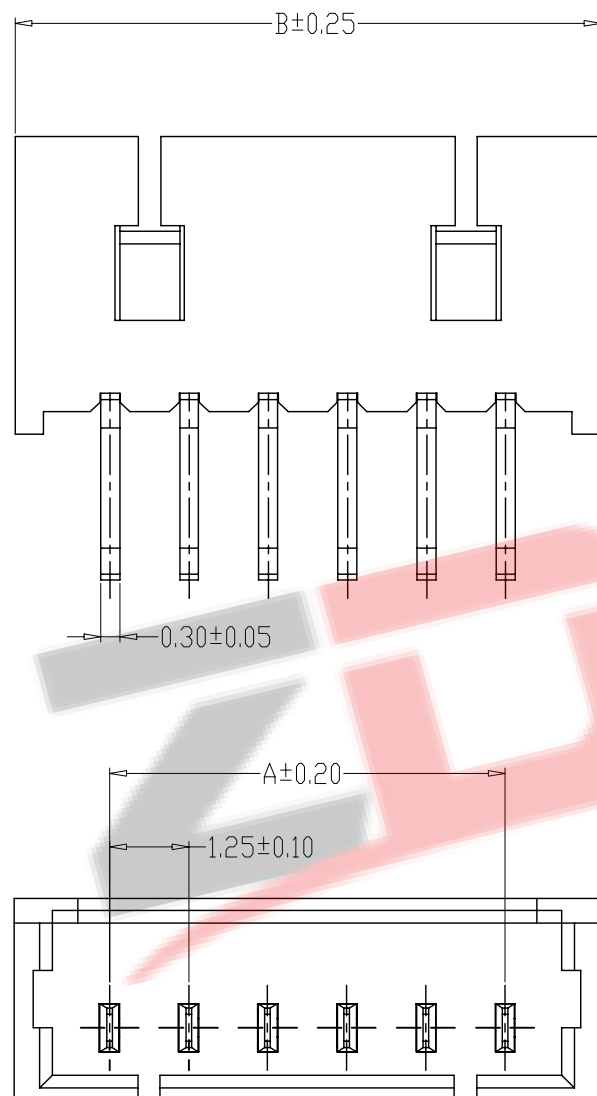


PCB LAYOUT

SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 125V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 100MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material: Wafer Nylon46, UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
A1251-02A	1.25	4.25
A1251-03A	2.50	5.50
A1251-04A	3.75	6.75
A1251-05A	5.00	8.00
A1251-06A	6.25	9.25
A1251-07A	7.50	10.50
A1251-08A	8.75	11.75
A1251-09A	10.00	13.00
A1251-10A	11.25	14.25
A1251-11A	12.50	15.50
A1251-12A	13.75	16.75
A1251-20A	23.75	26.75

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制 图 DRAWING	钱岳生 2013、07、01			料 号 PART NO.	A1251-NA	版本 REV.	A
			X.±0.25	X.'±2°	审 核	张 名			品 名 TITLE	1.25开口直针 WAFER DIP TYPE	页 次 SHEET	1/1
			.X±0.20	.X'±1°	CHECK	2013、07、03			客户料号 CUTM. NO.			
			.XX±0.15	.XX'±0.5°	核 准	张 名						
			.XXX±0.10	.XXX'±0.5°	APPROVAL	2013、07、05			ZDX 深圳市兆达鑫科技有限公司 Shenzhen Zhao Xin Technology Co., Ltd.			
					单 位 UNITS	MM	比 例 SCALE	1:1				