


SECTION A-A

NO. of Contacts (n)	Dimensions		
	A	B	C
002	1.5	2.9	6.1
003	3.0	4.4	7.6
004	4.5	5.9	9.1
005	6.0	7.4	10.6
006	7.5	8.9	12.1
007	9.0	10.4	13.6
008	10.5	11.9	15.1
009	12.0	13.4	16.6
010	13.5	14.9	18.1
011	15.0	16.4	19.6
012	16.5	17.9	21.1
013	18.0	19.4	22.6
014	19.5	20.9	24.1
015	21.0	22.4	25.6
016	22.5	23.9	27.1
017	24.0	25.4	28.6
018	25.5	26.9	30.1
019	27.0	28.4	31.6
020	28.5	29.9	33.1

主要技术性
 间距: 1.5mm
 温度范围: -25~+85°C
 额定电压: 50V AC, DC
 额定电流: 0.5A AC, DC
 接触阻抗: 0.04Ω
 绝缘阻抗: 800MΩ
 耐压: 200V AC/minute

材料
 壳体: LCP
 UL 94V-0 本色
 接触针: 黄铜 (镀锡)
 焊片: 磷青铜 (镀锡)

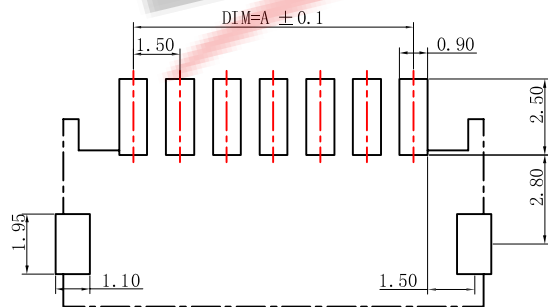

P. C. B LAYOUT

ZDX 深圳市兆达鑫科技有限公司
 Shenzhen Zhao Xin Technology Co., Ltd.

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY:	DATE:	PART NAME:	
	刘志强	2016.05.08	1.5 卧式贴片Wafer	
UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY:	DATE:	PART NO.	
	罗秋海	2016.05.08	MOLD NO.	
	APPROVED BY:	DATE:	DRAW NO.	
	陈鸣杰	2016.05.08	SHEET NO.	1 OF 1