
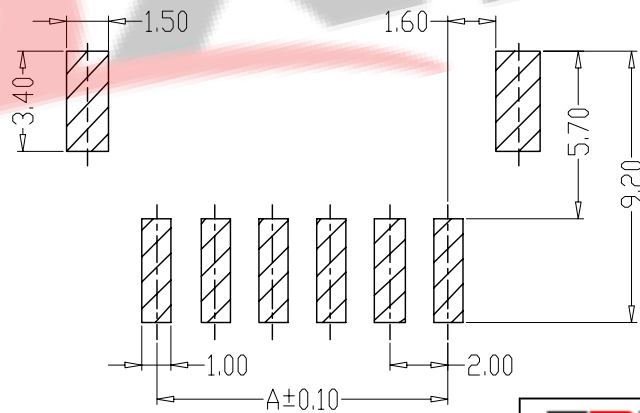


SPECIFICATIONS

- 1、Current Rating: 2A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material: Wafer Nylon 6T, UL94V-0
PIN Brass Tin-plated
Solder tad Brass Tin-plated

编 号	尺寸 (mm)		
	A	B	C
ZDX15-WF02-200	2.00	8.00	6.70
ZDX15-WF03-200	4.00	10.00	8.70
ZDX15-WF04-200	6.00	12.00	10.70
ZDX15-WF05-200	8.00	14.00	12.70
ZDX15-WF06-200	10.00	16.00	14.70
ZDX15-WF07-200	12.00	18.00	16.70
ZDX15-WF08-200	14.00	20.00	18.70
ZDX15-WF09-200	16.00	22.00	20.70
ZDX15-WF10-200	18.00	24.00	22.70
ZDX15-WF11-200	20.00	26.00	24.70
ZDX15-WF12-200	22.00	28.00	26.70
ZDX15-WF16-200	30.00	36.00	34.70

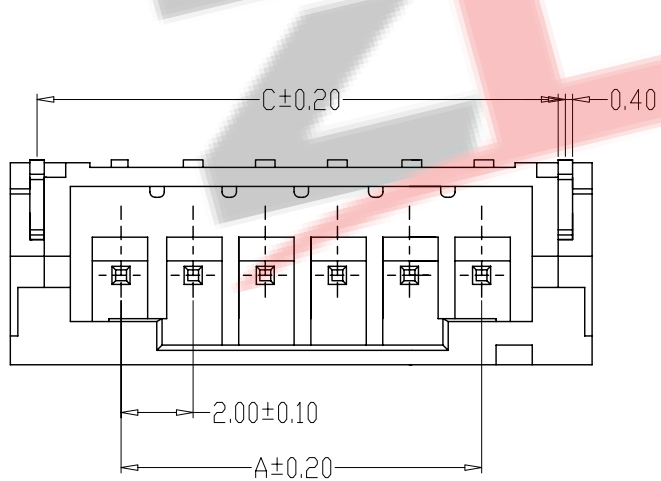

PCB LAYOUT

ZDX 深圳市兆达鑫科技有限公司
Shenzhen Zhao Xin Technology Co., Ltd.

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 刘志强	DATE : 2016.05.08	PART NAME: PH 卧贴	
	CHECKED BY: 罗秋海	DATE : 2016.05.08	PART NO.	SEE TABLE
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 陈鸣杰	DATE : 2016.05.08	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1