



TYPE 1

TYPE 2


SPECIFICATIONS

- 1、Current Rating: 2A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{M}\Omega$ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编号	尺寸 (mm)	
	A	B
ZDX15-02A-200	2.00	6.00
ZDX15-03A-200	4.00	8.00
ZDX15-04A-200	6.00	10.00
ZDX15-05A-200	8.00	12.00
ZDX15-06A-200	10.00	14.00
ZDX15-07A-200	12.00	16.00
ZDX15-08A-200	14.00	18.00
ZDX15-09A-200	16.00	20.00
ZDX15-10A-200	18.00	22.00
ZDX15-11A-200	20.00	24.00
ZDX15-12A-200	22.00	26.00
ZDX15-16A-200	30.00	34.00

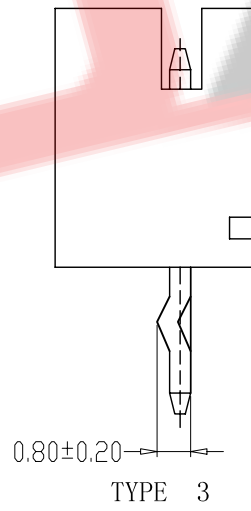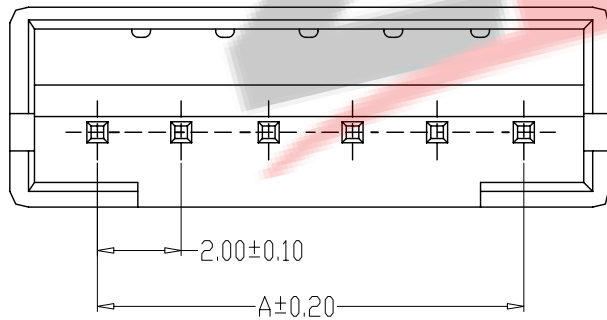

TYPE 3

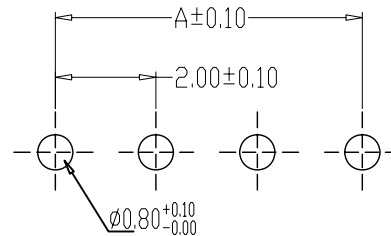

PCB LAYOUT

ZDX 深圳市兆达鑫科技有限公司
Shenzhen Zhao Xin Technology Co., Ltd.

<p>TOLERANCE:</p> <p>X.X ± 0.30</p> <p>X.XX ± 0.25</p> <p>X.XXX ± 0.15</p> <p>X' $\pm 2'$ X.X' $\pm 0.5'$</p> <p>UNIT: mm [inch]</p> <p>SCALE: 1:1 SIZE: A4</p>	DRAWN BY:	DATE:	PART NAME:	
	刘志强	2016.05.08	2.0 直针	
	CHECKED BY:	DATE:	PART NO.	
	罗秋海	2016.05.08	MOLD NO.	
	APPROVED BY:	DATE:	DRAW NO.	
	陈鸣杰	2016.05.08	SHEET NO.	1 OF 1