

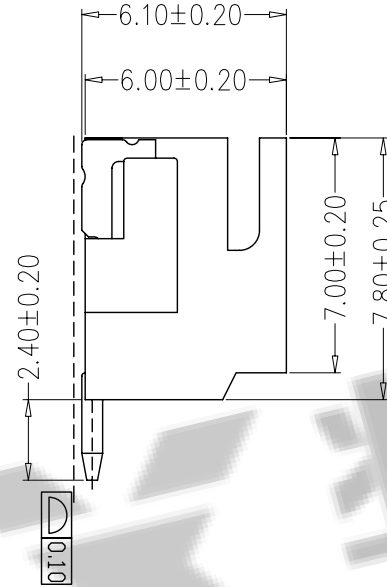


0.64±0.05

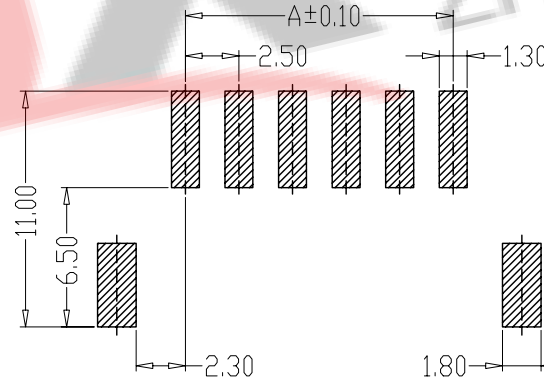

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material: Wafer LCP、PA6T、UL94V-0  
PIN Brass Tin-plated  
Solder tad Brass Tin-plated

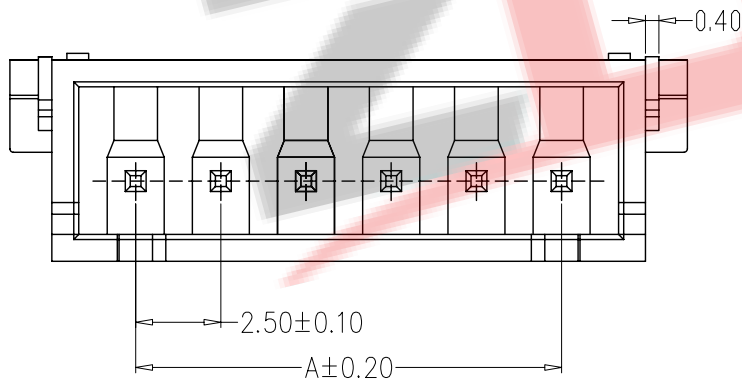

PCB LAYOUT

编号	尺寸 (mm)		
	A	B	C
ZDX61-WF02-250	2.50	7.50	10.00
ZDX61-WF03-250	5.00	10.00	12.50
ZDX61-WF04-250	7.50	12.50	15.00
ZDX61-WF05-250	10.00	15.00	17.50
ZDX61-WF06-250	12.50	17.50	20.00
ZDX61-WF07-250	15.00	20.00	22.50
ZDX61-WF08-250	17.50	22.50	25.00
ZDX61-WF09-250	20.00	25.00	27.50
ZDX61-WF10-250	22.50	27.50	30.00
ZDX61-WF11-250	25.00	30.00	32.50
ZDX61-WF12-250	27.50	32.50	35.00
ZDX61-WF20-250	47.50	52.50	55.00

**ZDX** 深圳市兆达鑫科技有限公司  
Shenzhen Zhao Xin Technology Co., Ltd.

<p>TOLERANCE:</p> <p>X.X ±0.30</p> <p>X.XX ±0.25</p> <p>X.XXX ±0.15</p> <p>X' ±2' X.X' ±0.5'</p> <p>UNIT: mm [inch]</p> <p>SCALE:1:1 SIZE: A4</p>	DRAWN BY :	DATE :	PART NAME:	
	刘志强	2016.05.08	2.54PH 卧贴	
	CHECKED BY:	DATE :	PART NO.	
	罗秋海	2016.05.08	MOLD NO.	
APPROVED BY:	DATE :	DRAW NO:		
陈鸣杰	2016.05.08	SHEET NO.	1 OF 1	