

Circuit Diagram


NOTE:  
Rating: DC 30V 0.1A  
Operating Force: 40±10gf  
Lifetime: 100,000 Cycles



⑤	Contact Spring	—	1	Phosphor Bronze	Ag Plated	—
④	Terminal	—	4	Phosphor Bronze	Ag Plated	—
③	Base	—	1	NYLON	Black	—
②	Cover	—	1	NYLON	Black	—
①	Knob	—	1	NYLON	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		<div><div>ZDX</div><div>深圳市兆达鑫科技有限公司 Shenzhen Zhao Xin Technology Co., Ltd.</div></div>		
DRAWN	刘志强	2015.08.18					
CHECKED	李文毅	2015.08.18		TITLE:	DETECTOR SWITCHS		
APPROVALS	张少辉	2015.08.18		PART NO.	KFC-W-07A		
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 	
	10~30	±0.20					
	5~10	±0.15					
	~ 5	±0.10					
		±2'	DRAWING NO.			SHEET 1 OF 1	

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.

ROHS

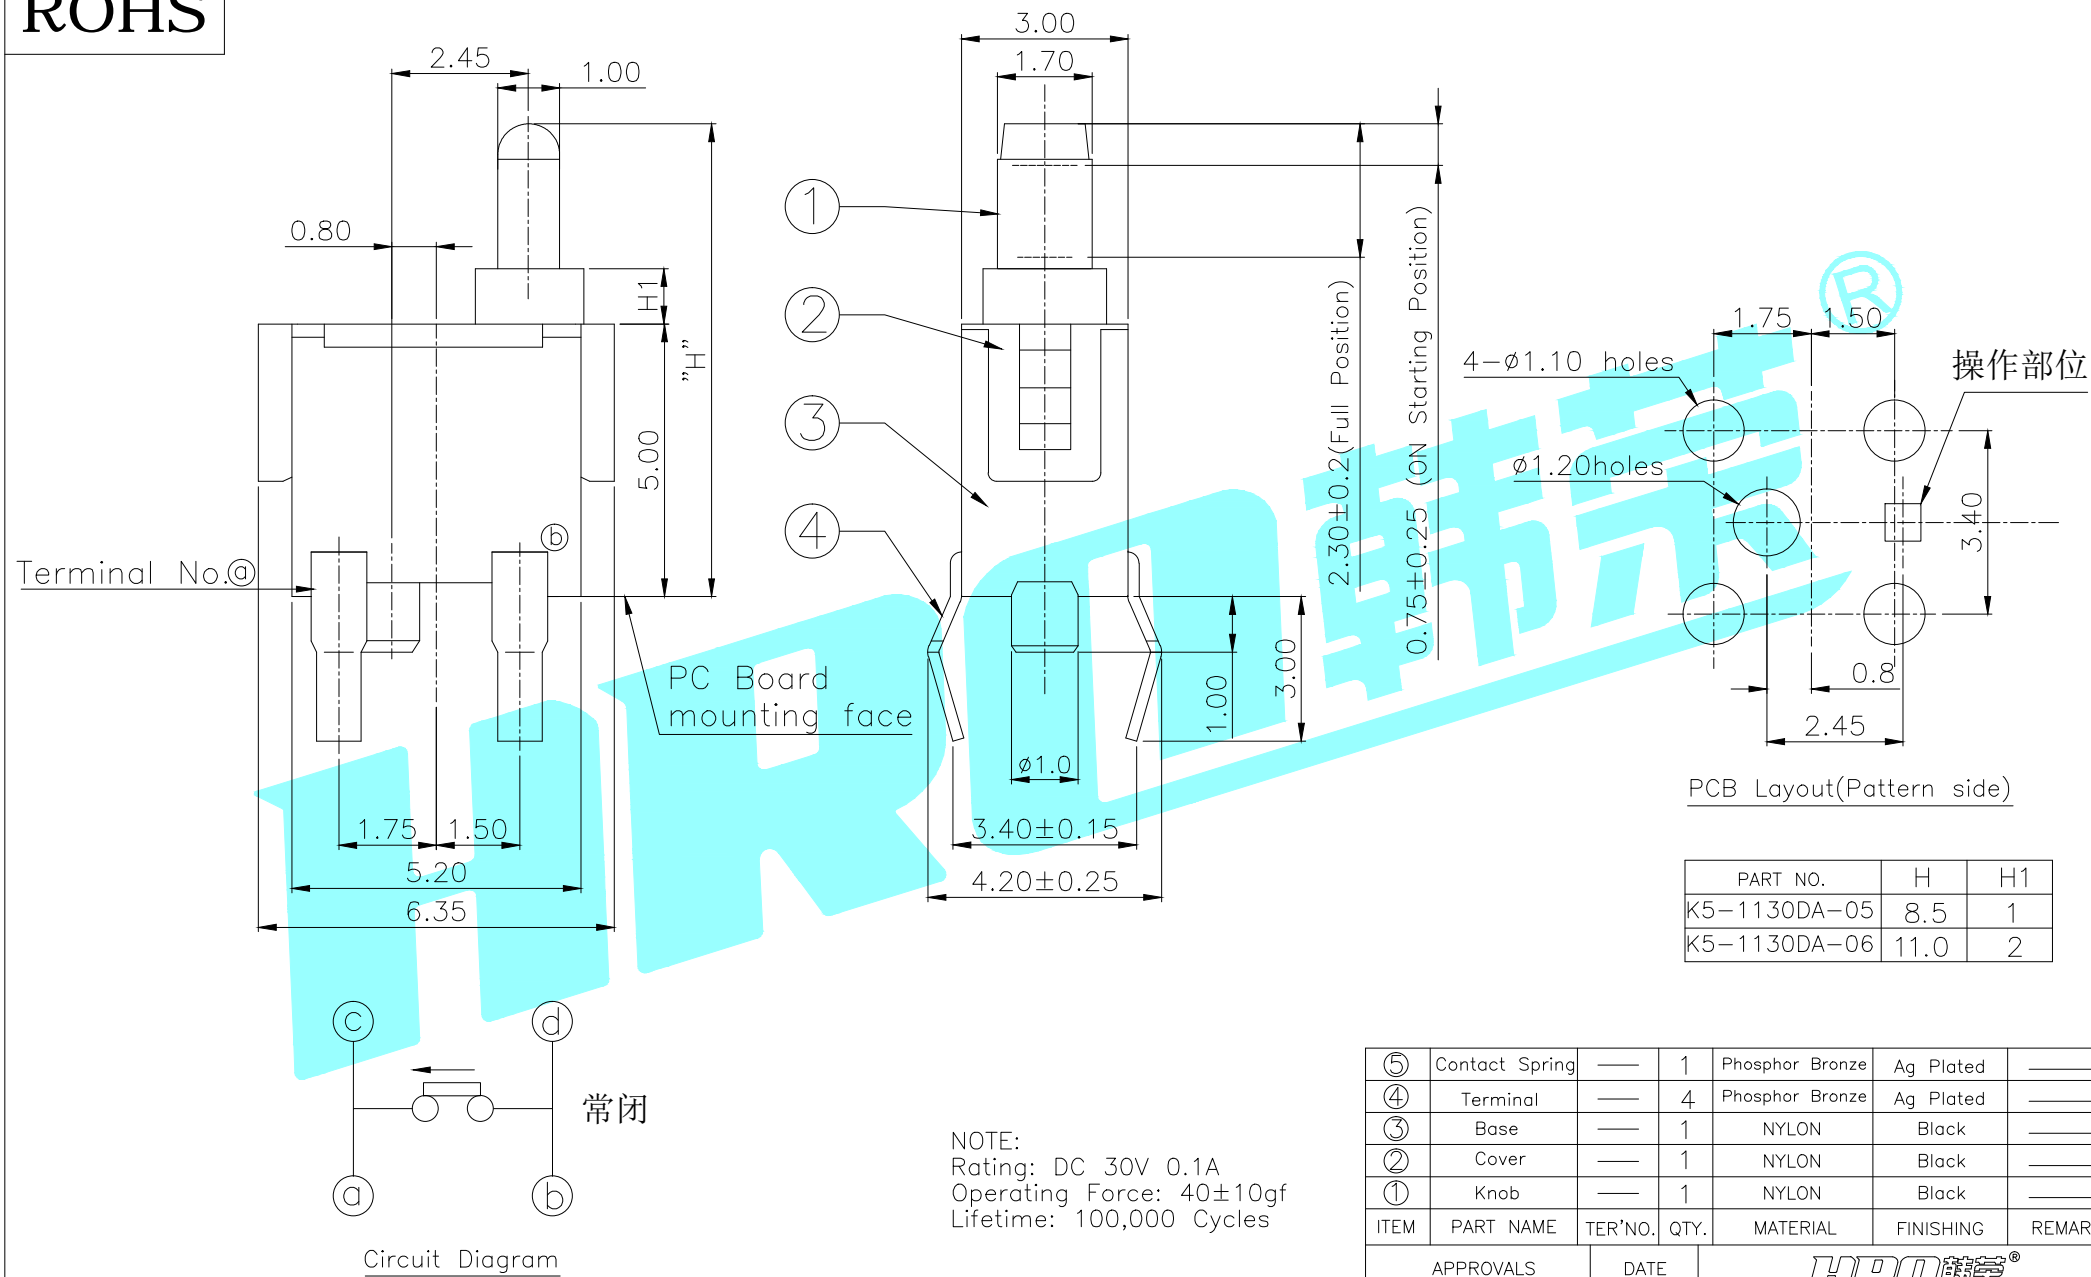

⑤	Contact Spring	—	1	Phosphor Bronze	Ag Plated	—
④	Terminal	—	4	Phosphor Bronze	Ag Plated	—
③	Base	—	1	NYLON	Black	—
②	Cover	—	1	NYLON	Black	—
①	Knob	—	1	NYLON	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	 ELECTRONICS CO.,LTD		
DRAWN		LIUCAN	2020.12.17			
CHECKED				TITLE:	DETECTOR SWITCHES	
APPROVALS				PART NO.	K5-1130DA-□□	
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			
		5~10	±0.15			
		~ 5	±0.10			
		±2'		DRAWING NO.	—	PROJ: 
						SHEET 1 OF 1