
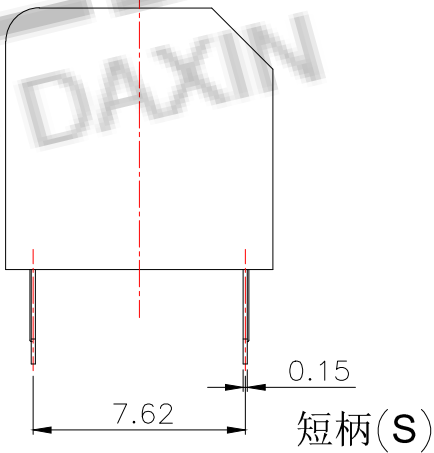
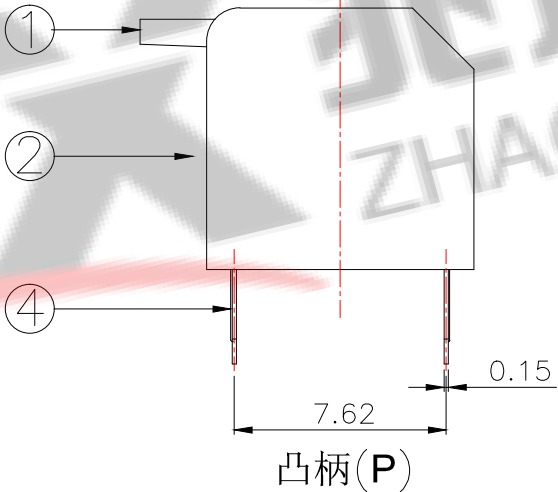
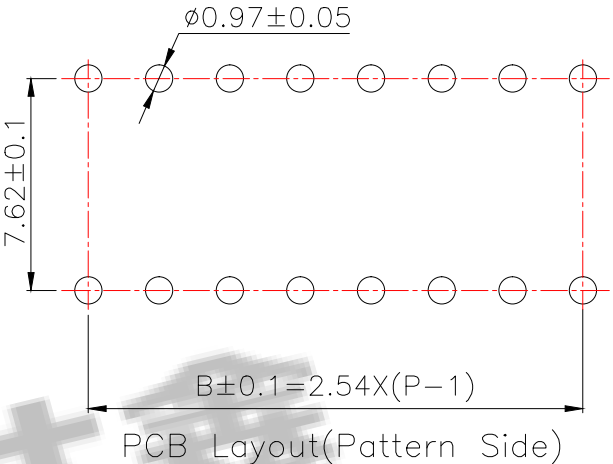



NOTE:
1.Rating: 24V 25mA DC
2.Insulation Resistance: ≥100 MΩ
3.Withstand voltage: AC 500V 1Minute
4.Operating Force Range: 1000gf Max
5.Electrical Life: 2,000 Cycles
6.Operating Temperature range -20~+70°C
7.Ambient Humidity used: ≤85%RH



Position(位数)	1P	2P	3P	4P	5P	6P	7P	8P	9P	10P	12P
DIM.A(长度)	3.54	6.64	9.18	11.72	14.26	16.80	19.34	21.88	24.42	26.96	32.04
DIM.B(长度)	—	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86	27.94
PART NO. 凸柄(P)	DP-01RP	DP-02RP	DP-03RP	DP-04RP	DP-05RP	DP-06RP	DP-07RP	DP-08RP	DP-09RP	DP-10RP	DP-12RP
短柄(S)	DP-01RS	DP-02RS	DP-03RS	DP-04RS	DP-05RS	DP-06RS	DP-07RS	DP-08RS	DP-09RS	DP-10RS	DP-12RS
PART NO. 凸柄(P)	DP-01BP	DP-02BP	DP-03BP	DP-04BP	DP-05BP	DP-06BP	DP-07BP	DP-08BP	DP-09BP	DP-10BP	DP-12BP
短柄(S)	DP-01BS	DP-02BS	DP-03BS	DP-04BS	DP-05BS	DP-06BS	DP-07BS	DP-08BS	DP-09BS	DP-10BS	DP-12BS

⑤	Gum Water	—	—	Epikote	Black	—
④	Terminal	—	—	Phosphor bronze	Au Plating	—
③	Base	—	1	PBT	Black	—
②	Cover	—	1	PBT	Red/Blue	—
①	Keystoke	—	—	PBT	White	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	 深圳市兆达鑫科技有限公司 Shenzhen Zhao Xin Technology Co., Ltd.		
DRAWN	刘志强	2015.08.18			
CHECKED	李文毅	2015.08.18	TITLE:	DIP SWITCH	
APPROVALS	张少辉	2015.08.18	PART NO.	2.54 琴键式 DIP	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
	10~30	±0.20			
	5~10	±0.15			
	~ 5	±0.10			
			±2'	DRAWING NO.	
					SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			