

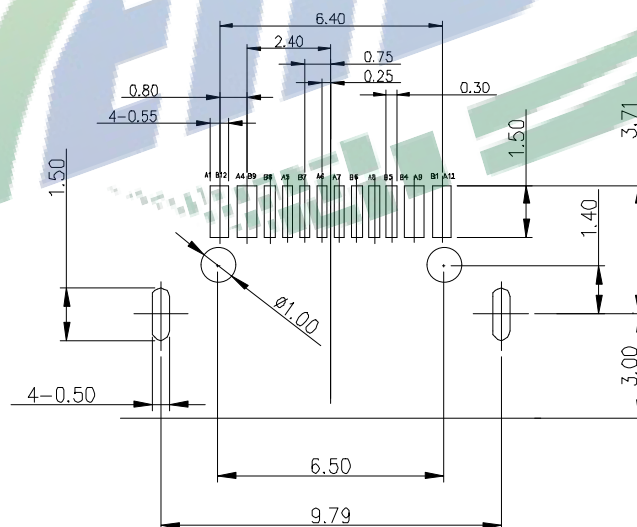
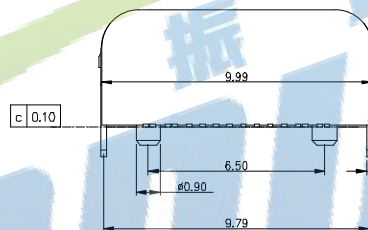
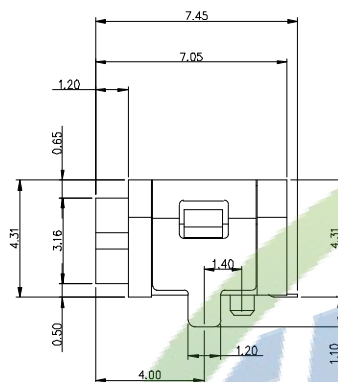
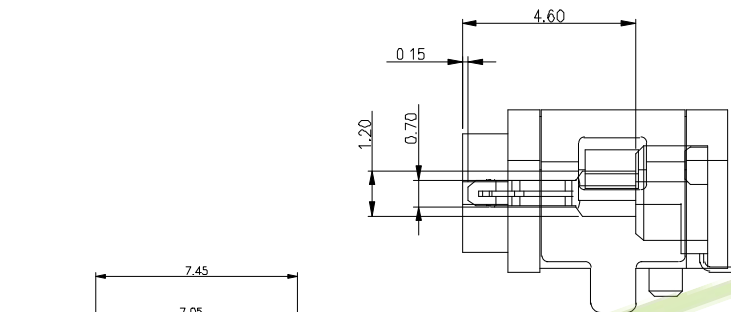

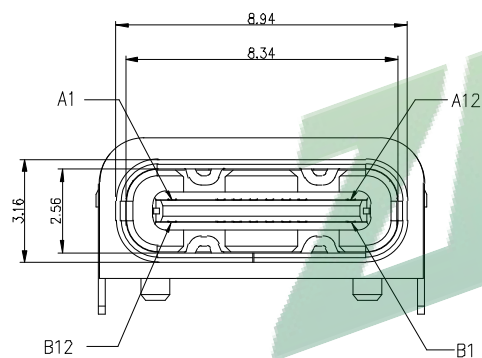
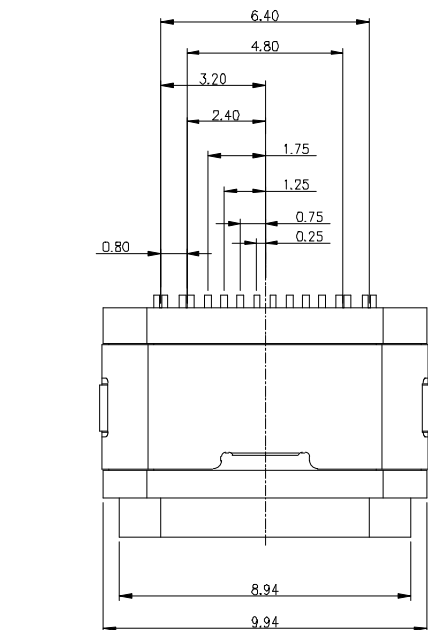





RECOMMENDED P.C.B. LAYOUT

TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$ 

带硅胶圈图示



NOTES:

SPECIFICATION:

- 1.CURRENT RATING: 3.0 A
- 2.VOLTAGE RATING: 3.0 V
- 3.VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX
SHIELD: 50mΩ/MAX
LLCR MAX. CHANGE OF ALL PINS: 10Ωm
- 4.INSULATION RESISTANCE: 100MΩ MIN
- 5.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1MIN
- 6.INSERTION FORCE: 0.5~2.0kgf
- 7.UNMATING FORCE: 0.8~2.0kgf
- 8.DURABILITY: 10000 CYCLES
- 9.OPERATING TEMPERATURE: -35°C~+85°C
- 10.THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C
- 11.WATERPROOF:IP-X7.

振端精密科技（深圳）有限公司
Zhenduan precision technology (Shenzhen) Co., LtdTOLERANCE:
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
X.XX ±0.10
X.X ±0.10
X.X ±0.10
X.X ±0.10

UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY:

刘志强

CHECKED BY:

李毅

APPROVED BY:

张少辉

DATE:

2015.08.18

DATE:

2015.08.18

DATE:

2015.08.18

PART NAME: TYPE-C16P防水两脚
前插后贴全塑L7.45

PART NO. SEE TABLE

MOLD NO.

DRAW NO: ZDHS0600FS275

SHEET NO. 1 OF 1