
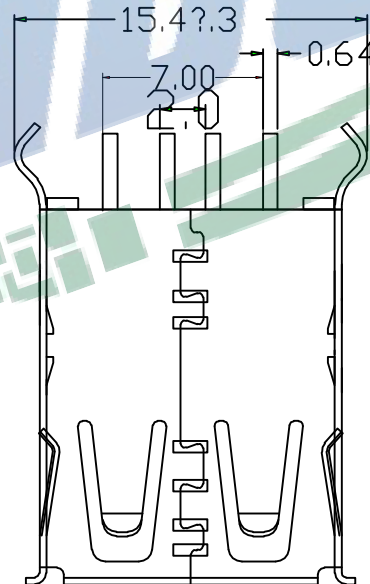


RBCOMMENDBD P.C.B PATTBRN LAY
OUT

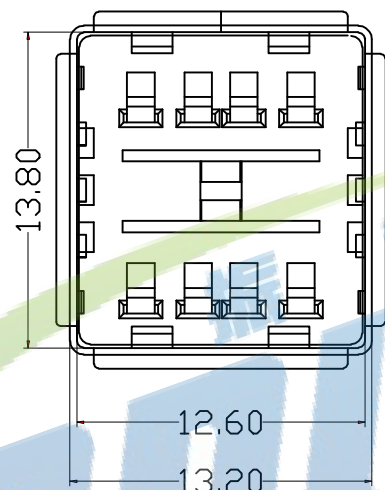

NOTES:

- Housing: Thermoplastics,UL94V-0
- Contact: Copper Alloy
- Shell: Copper Alloy/Steel
- Voltage Current Rating:1.5 AMP. 30V AC
- Insulation Resistance:1000MΩ Min.
- Contact Resistance:30 MΩ Max.
- Dielectric Withstanding Voltage:500W AC
- Temperature Range:-35°C to +85°C
- Insulator color: Black/White
- Plastic material:PBT/LCP/Others
- Shell finish:Nickel plated/Tin-Lead plated
- Mechanical:
- Mating Force:3.5KG MAX
- Unmating Force:1.02 KG MIN.
- Contact finish:
- 01: Selective Gold Flash
- 02: Selective Gold 3U"
- 03: Selective Gold 5U"
- 04: Selective Gold 15U"
- 05: Selective Gold 30U"

zhenduan 振端精密科技(深圳)有限公司
Zhenduan precision technology (Shenzhen) Co., Ltd

| | | | | |
|---|--------------|------------|--------------------|---------------|
| TOLERANCE: X.XX ±0.30 X.XXX ±0.20 X.XXX ±0.10 X.X ±0.10 X.X ±0.05 X.X ±0.05 | DRAWN BY : | DATE : | PART NAME: | |
| | 刘志强 | 2015.08.18 | USB双层180度卷边弯脚H17.0 | |
| UNIT: mm [inch] SCALE:1:1 SIZE: A4 | CHECKED BY: | DATE : | PART NO. | SEE TABLE |
| | 李毅 | 2015.08.18 | MOLD NO. | |
| | APPROVED BY: | DATE : | DRAW NO: | ZDXAFUSB20588 |
| | 张少辉 | 2015.08.18 | SHEET NO. | 1 OF 1 |