受控文件

http://www.szzdjmkj.com

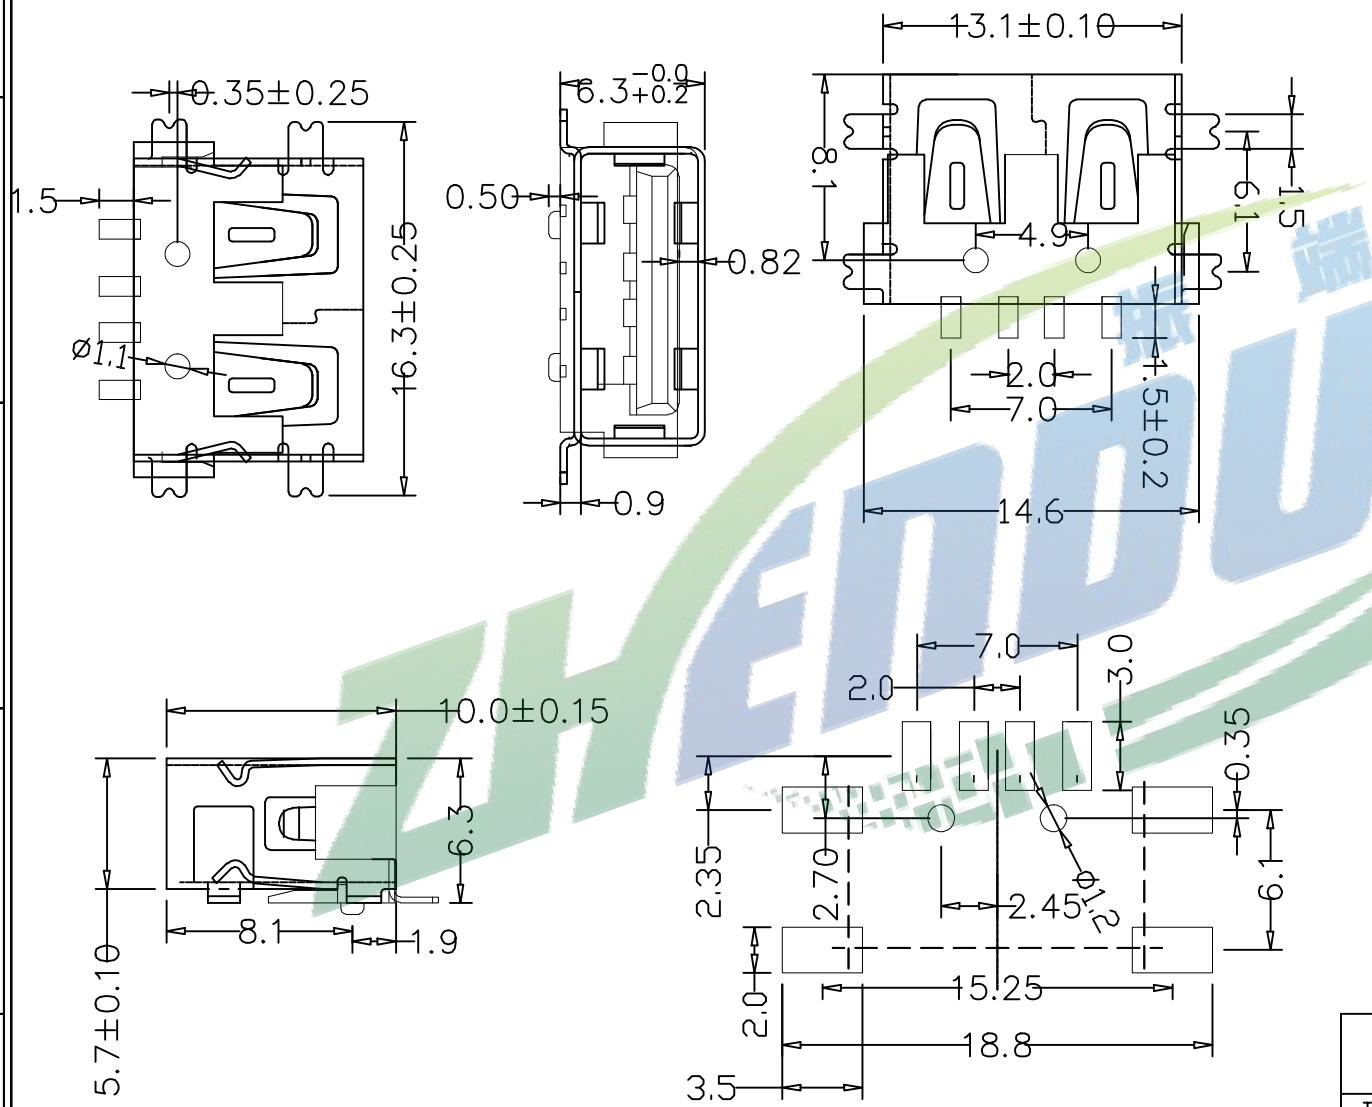

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating: 1.5 AMP. 30V AC

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 30 MΩ Max.

Dielectric Withstanding Voltage: 500W AC

Temperature Range: -35℃ to +85℃

Insulator color: Black/White

Plastic material: PBT/LCP/Others

Shell finish: Nickel plated/Tin-Lead plated

Mechanical:

Mating Force: 3.5KG MAX

Unmating Force: 1.02 KG MIN.

Contact finish:

01: Selective Gold Flash

02: Selective Gold 3U"

03: Selective Gold 5U"

04: Selective Gold 15U"

05: Selective Gold 30U"

振端精密科技（深圳）有限公司

Zhenduan precision technology (Shenzhen) Co., Ltd

TOLERANCE: X.X ±0.30, X.XX ±0.20, X.XXX ±0.10, X.° ±10°, .X° ±8°, .X° ±5°	DRAWED BY: 刘志强	DATE: 2015.08.18	PART NAME: 10.0短体全贴 直边6.3
	CHECKED BY: 李 毅	DATE: 2015.08.18	PART NO.: SEE TABLE
			MOLD NO.:
UNIT: mm [inch]	APPROVED BY: 张少辉	DATE: 2015.08.18	DRAW NO.: ZDXAFUSB20114
SCALE:1:1 SIZE: A4			SHEET NO.: 1 OF 1