
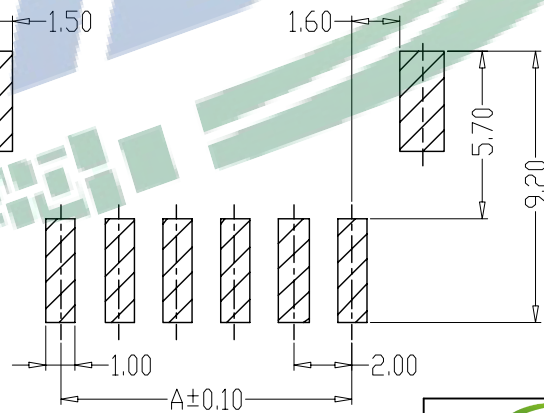


SPECIFICATIONS

- 1、Current Rating: 2A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance:  $20\text{m}\Omega$  Max
- 5、Insulation Resistance:  $1000\text{M}\Omega$  Min
- 6、Withstanding Voltang:  $800\text{V AC/minute}$
- 7、Material: Wafer Nylon 6T, UL94V-0  
PIN Brass Tin-plated  
Solder tad Brass Tin-plated

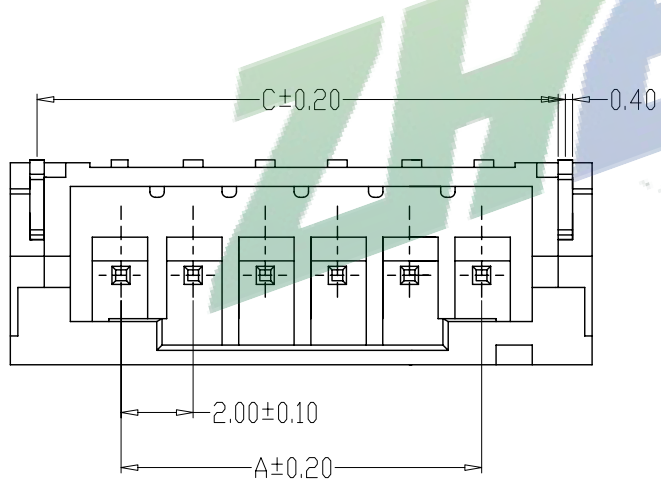

编 号	尺寸 (mm)		
	A	B	C
ZDX15-WF02-200	2.00	8.00	6.70
ZDX15-WF03-200	4.00	10.00	8.70
ZDX15-WF04-200	6.00	12.00	10.70
ZDX15-WF05-200	8.00	14.00	12.70
ZDX15-WF06-200	10.00	16.00	14.70
ZDX15-WF07-200	12.00	18.00	16.70
ZDX15-WF08-200	14.00	20.00	18.70
ZDX15-WF09-200	16.00	22.00	20.70
ZDX15-WF10-200	18.00	24.00	22.70
ZDX15-WF11-200	20.00	26.00	24.70
ZDX15-WF12-200	22.00	28.00	26.70
ZDX15-WF16-200	30.00	36.00	34.70

PCB LAYOUT

**zhenduan** 振端精密科技 (深圳) 有限公司  
Zhenduan precision technology (Shenzhen) Co., Ltd

TOLERANCE: X.X $\pm 0.30$ X.XX $\pm 0.25$ X.XXX $\pm 0.15$ X.' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 刘志强	DATE : 2016.05.08	PART NAME: PH 卧贴	
	CHECKED BY: 罗秋海	DATE : 2016.05.08	PART NO.	SEE TABLE
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 陈鸣杰	DATE : 2016.05.08	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1